SEQUENCE OF OPERATION

1. General lighting (a) auto On to 50% when occupancy detected.
2. Space manual control On/Off/Dim of general lighting (a) and down lighting (b, c) with scene switch.
3. Scene settings
   a. General Lighting (a) 100%, (b) 0%, (c) 0%
   b. Presentation (a) 75%, (b) 50%, (c) 100%
   c. Video (a) 20%, (b) 75%, (c) 0%
   d. All Off (a) 0%, (b) 0%, (c) 0%
4. Auto off all lighting within 30 minutes of occupants leaving.

TYPICAL DRAWING DETAIL NOTES

1. Follow manufacturer instructions for proper product placement, installation, wiring and operation.
2. Diagram is typical for space type. Provide proper quantity and type of occupancy sensors, switches, room controllers, daylighting sensors, etc., per code requirement for each space.
3. Use pre-terminated CAT5e cables with splitters and couplers as needed using a free topology wiring arrangement to connect lighting control devices.

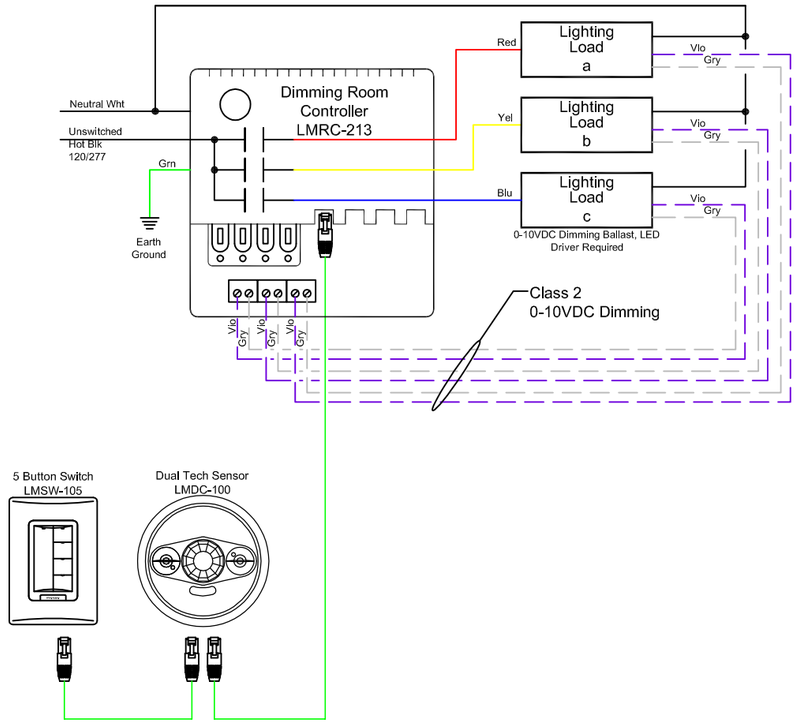

Wattstopper
www.legrand.us/wattstopper
Phone: 888-852-2278
legrand®

Title
ASHRAE_2010 SMALL CONFERENCE ROOM
0-10V DIMMING

Scale	Drawing#	Date	Rev.
None	A10SCDD-W	3/2/2018	