WATTSTOPPER®

Private Restroom

ASHRAE 90.1 (2013) Compliant

On/Off Switching with Line Voltage Wallbox Product

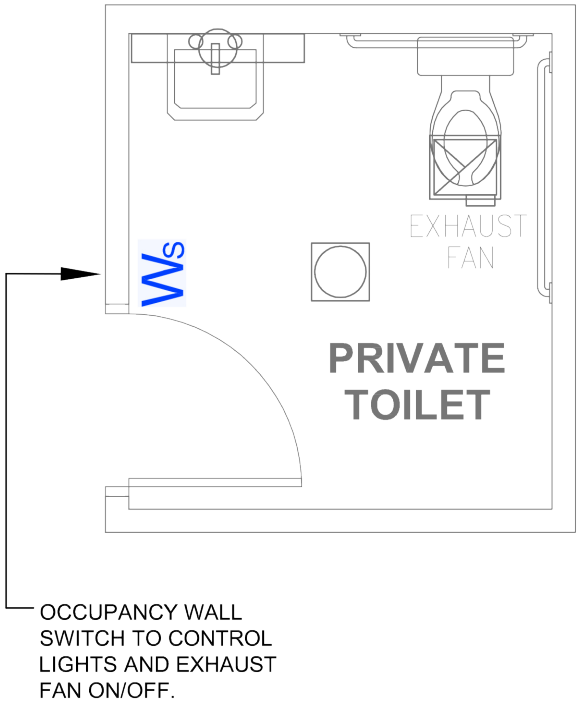

SEQUENCE OF OPERATION

1. Lighting and fan are manually controlled On/Off with occupancy sensor switch.
2. Lighting and fan will auto Off within 15 minutes of occupants leaving.

SIGN CONSIDERATIONS

- Demand Response, time scheduling and remote programming functions may be enabled by using DLM product with LMBC-300 Network Bridge connectivity for this space.

BILL OF MATERIALS

WS-301 (1)	Wallbox PIR Occupancy Sensor

CODE REQUIREMENTS

9.4.1.1(a)	Local Control Device
9.4.1.1(b, c)	Manual On / Partial Auto On
9.4.1.1(h)	Auto Full Off