


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
1	WAS PART #70400179	04/02/97	


CAUTION: VERIFY WIRING, LABEL ON MODULE SHOULD BE STAMPED '568A' or '568B' or 'USOC'.

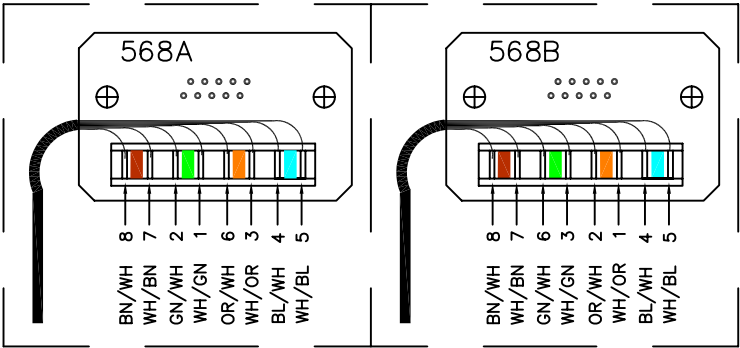

CABLE INSTALLATION

NOTE: Maintain pair twist to within 1/2" (13mm) of point of termination for maximum data performance.
The station cables must be routed at the rear of the IMO outlet as displayed in the drawing above.
Excess wires must be trimmed when using push-on caps to terminate the station wire to the 110 type insert.
NOTE: SEE REVERSE SIDE FOR CABLE TERMINATION INSTRUCTIONS.

NOTE: The MINIMUM DEPTH of the WALL OUTLET should be 1.50 inches.



REQUIRED TERMINATION TOOL
OR-60300005 (TOOL)
OR-60300006 (BLADE)
110 IMPACT TOOL FOR
TERMINATION OF CABLE PAIRS

110C-4 INSERT COLOR CODE	RJ11 6P6C USOC WIRING	RJ45 8P8C EIA 568-A WIRING	RJ45 8P8C EIA 568-B WIRING	RJ61X 8P8C USOC WIRING
WHITE/BLUE	4	5	5	5
BLUE/WHITE	3	4	4	4
WHITE/ORANGE	2	3	1	3
ORANGE/WHITE	5	6	2	6
GREEN/GREEN	1	1	3	2
GREEN/WHITE	6	2	6	7
WHITE/BROWN		7	7	1
BROWN/WHITE		8	8	8

Xref H:\DWG\ULCUL.DWG




DATE: 04/02/1997 REV: 1 PART# 71600179 CAD: 001791

SERIES 2
SERIES 2 IMO INSTRUCTION SHEET SINGLE JACK

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
1	WAS PART #70400179	04/02/97	


CAUTION: VERIFY WIRING, LABEL ON MODULE SHOULD BE STAMPED '568A' or '568B' or 'USOC'.

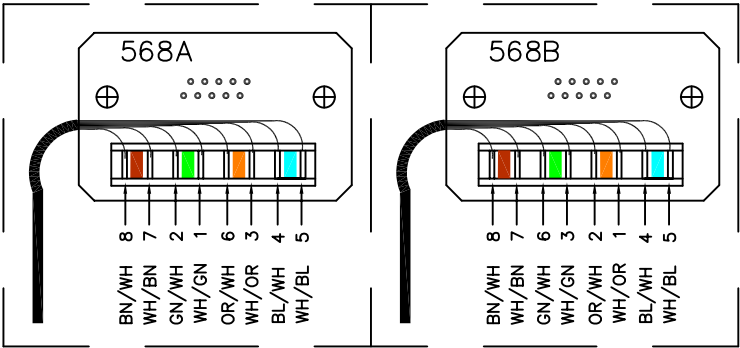

CABLE INSTALLATION

NOTE: Maintain pair twist to within 1/2" (13mm) of point of termination for maximum data performance.
The station cables must be routed at the rear of the IMO outlet as displayed in the drawing above.
Excess wires must be trimmed when using push-on caps to terminate the station wire to the 110 type insert.
NOTE: SEE REVERSE SIDE FOR CABLE TERMINATION INSTRUCTIONS.

NOTE: The MINIMUM DEPTH of the WALL OUTLET should be 1.50 inches.



REQUIRED TERMINATION TOOL
OR-60300005 (TOOL)
OR-60300006 (BLADE)
110 IMPACT TOOL FOR
TERMINATION OF CABLE PAIRS


110C-4 INSERT COLOR CODE	RJ11 6P6C USOC WIRING	RJ45 8P8C EIA 568-A WIRING	RJ45 8P8C EIA 568-B WIRING	RJ61X 8P8C USOC WIRING
WHITE/BLUE	4	5	5	5
BLUE/WHITE	3	4	4	4
WHITE/ORANGE	2	3	1	3
ORANGE/WHITE	5	6	2	6
GREEN/GREEN	1	1	3	2
GREEN/WHITE	6	2	6	7
WHITE/BROWN		7	7	1
BROWN/WHITE		8	8	8

Xref H:\DWG\ULCUL.DWG




DATE: 04/02/1997 REV: 1 PART# 71600179 CAD: 001791

SERIES 2
SERIES 2 IMO INSTRUCTION SHEET SINGLE JACK

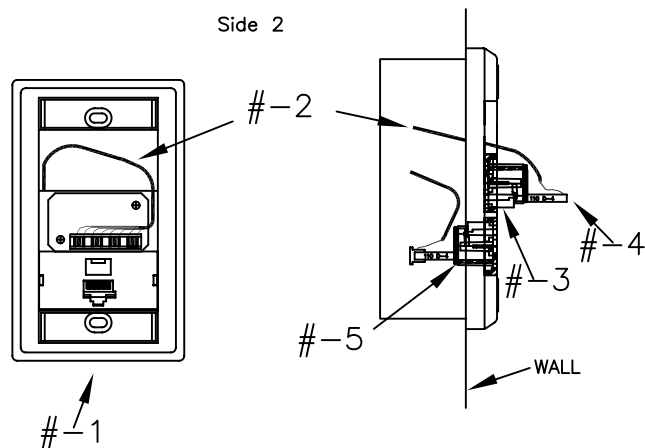

1. MOUNT WALL PLATE TO WALL WITHOUT THE MODULES INSTALLED INTO FACEPLATE.
2. BRING ALL STATION CABLES THROUGH THE OPENING OF THE FACEPLATE.
3. INSTALL 1ST MODULE INTO THE FACEPLATE WITH THE TERMINAL STRIP FACING OUT. THIS WILL SUPPORT THE MODULE DURING THE CABLE LEAD PUNCH DOWN TO THE TERMINAL STRIP.
4. TERMINATE ALL STATION CABLES TO THE MODULES.
5. REVERSE THE MODULES AND SNAP INTO THE FACEPLATE.

NOTE: A SERVICE LOOP SHOULD BE PROVIDED TO ELIMINATE THE EXCESS CABLE FROM BEING PLACED IN OUTLET BOX. IE ABOVE CEILING OR IN WALL.

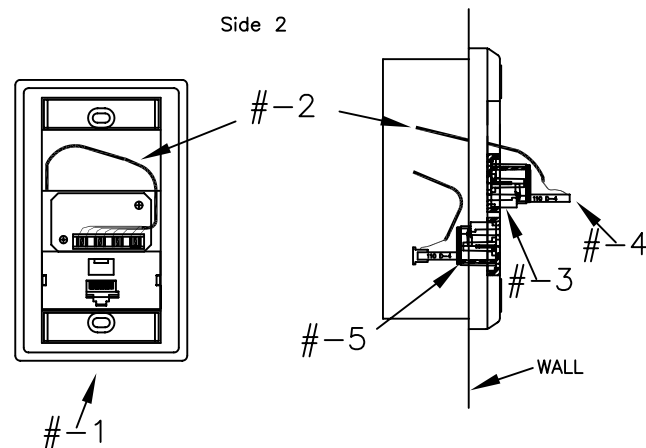

1. MOUNT WALL PLATE TO WALL WITHOUT THE MODULES INSTALLED INTO FACEPLATE.
2. BRING ALL STATION CABLES THROUGH THE OPENING OF THE FACEPLATE.
3. INSTALL 1ST MODULE INTO THE FACEPLATE WITH THE TERMINAL STRIP FACING OUT. THIS WILL SUPPORT THE MODULE DURING THE CABLE LEAD PUNCH DOWN TO THE TERMINAL STRIP.
4. TERMINATE ALL STATION CABLES TO THE MODULES.
5. REVERSE THE MODULES AND SNAP INTO THE FACEPLATE.

NOTE: A SERVICE LOOP SHOULD BE PROVIDED TO ELIMINATE THE EXCESS CABLE FROM BEING PLACED IN OUTLET BOX. IE ABOVE CEILING OR IN WALL.