


SEQUENCE OF OPERATION

1. General lighting (a) auto On to 50% and controlled receptacles auto On when occupancy detected.
2. Manual On/Off/Dim of general lighting (a) and down lighting (b, c) with scene switch.
3. Scene settings
 - a. General Lighting (a) 100%, (b) 0%, (c) 0%
 - b. Video (a) 20%, (b) 75%, (c) 0%
 - c. Conferencing (a) 50%, (b) 50%, (c) 25%
 - d. All Off (a) 0%, (b) 0%, (c) 0%
4. Auto off all lighting and controlled receptacles within 20 minutes of occupants leaving.

TYPICAL DRAWING DETAIL NOTES

1. Follow manufacturer instructions for proper product placement, installation, wiring and operation.
2. Diagram is typical for space type. Provide proper quantity and type of occupancy sensors, switches, room controllers, daylighting sensors, etc., per code requirement for each space.
3. When general lighting power in the sidelight daylight area is 150w or greater, automatic daylight responsive controls are required.
4. Use pre-terminated CAT5e cables with splitters and couplers as needed using a free topology wiring arrangement to connect lighting control devices.

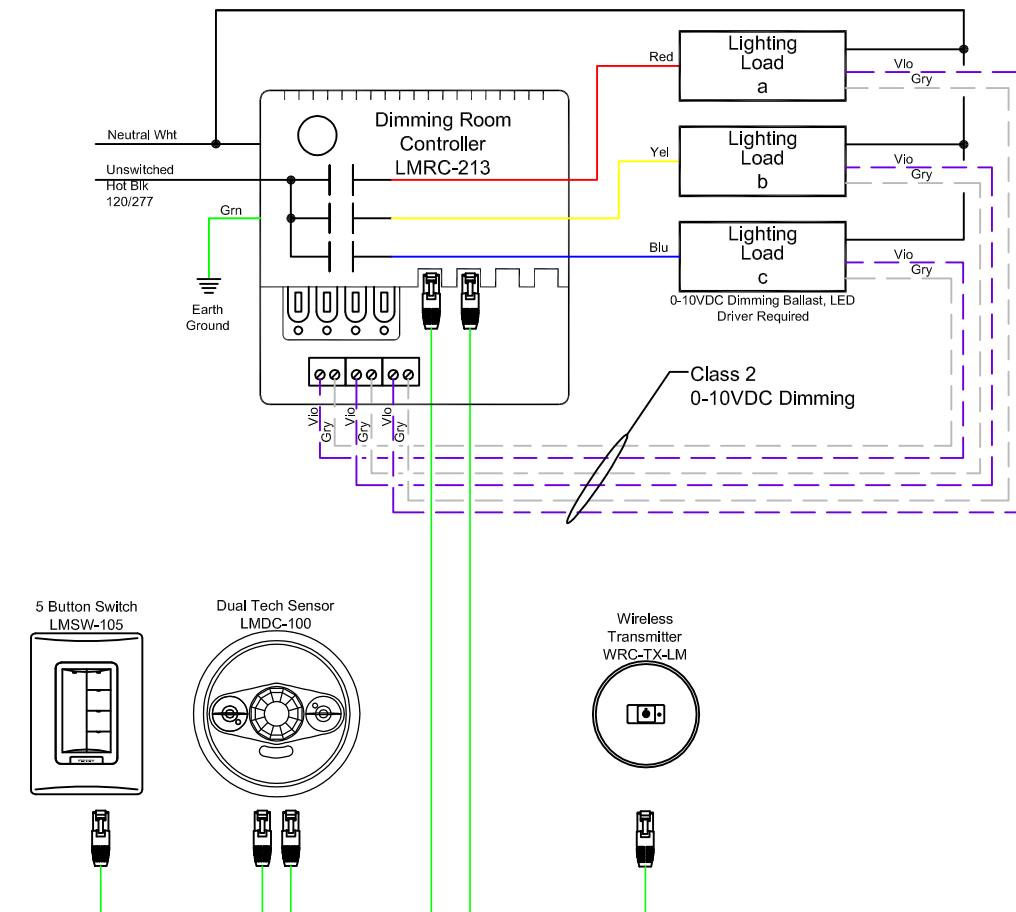

Wattstopper			
www.legrand.us/wattstopper Phone: 888-852-2278			
Title ASHRAE_2013 SMALL CONFERENCE ROOM 0-10V DIMMING			
Scale	Drawing#	Date	Rev.
None	A13SCDDP-W	2/14/2018	2