| REV | DESCRIPTION | INT: | REV. DATE | APPROVED |
|---|---|---|---|---|
| 1 | ECO# CO2313 | MJS | 7/16/07 | CG |
| 2 | ECO#C02320 | MJS | 7/20/07 | CG |
| 3 | ECO#C02285 | MJS | | |
| | | | | |

**MATERIAL:** **White 16lb (60g/m sq)**
**Uncoated, recycled stock preferred**

**Final Trim Size:** **8.5" (Wide) x 5.5" (High)**

**Ink:** **Black**

**Print:** **Two Sides**

**# Pages:** **2**

**# Sheets:** **1**

**TITLE BOX PAGE ONLY.**
**DO NOT MAKE FILM • DO NOT PRINT**

IF YOU HAVE ANY QUESTIONS REGARDING SPECIFICATIONS OR REQUIRE ADDITIONAL FILE FORMATTING, PLEASE CONTACT Mary Jo Sowinski.

Phone: 408-486-7511

Email: maryjo.sowinski@wattstopper.com

All information in this drawing is the property of Watt Stopper/Legrand and cannot be copied or used without the written approval of Watt Stopper/Legrand.

| | |
|---|---|
| **DRAWN BY** | SOWINSKI |
| **PLM** | |
| **MARCOM** | |
| **ENGINEERING** | |
| **QA** | |
| | |
| **TITLE BOX PG** | SCALE 1:1 |

Watt Stopper | legrand®
SANTA CLARA, CALIFORNIA

Title: MKFOB v2 Quick Start Guide

| **Drawing #:** | **Orig. Drawing Date:** 9 JUL 07 | **REV. #:** |
|---|---|---|
| 08665 | **Revision Date: 25 JAN 08** | 3 |

# MKF0B v2

**Key Fob Remote Control**

Quick Start Guide

## EASY SETUP

If you have a wireless Miro system that already has house scenes programmed, this is all you need to do to include your new MKF0B in the system.

With this simple setup, the MKF0B recalls house scenes 1, 5, and 11 from buttons **1**, **2**, and **3**. Scene 11 is the scene that executes when you tap the bottom of the ON/OFF paddle on a house scene controller.

**MKF0B**

| **Button** | **Recall** |
|---|---|
| **1** | House Scene 1 |
| **2** | House Scene 5 |
| **3** | House Scene 11 (bottom of house controller paddle) |

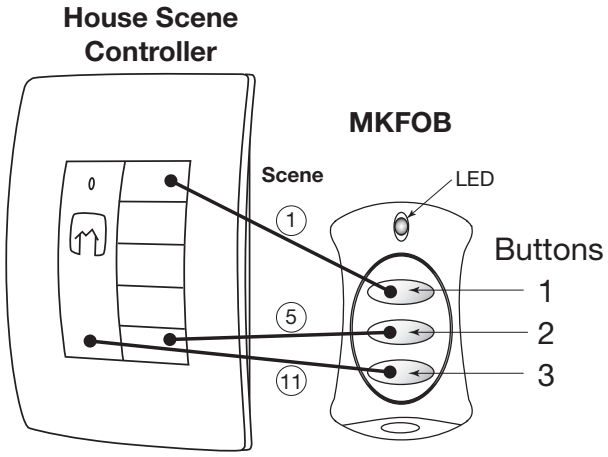


1. Tap any button on the MKF0B. The LED should turn solid yellow.*

   If the LED is a color other than yellow* see "I need to start over" in the Troubleshooting section of the Installation Instructions.

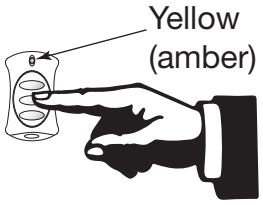


* "Yellow" represents the yellow/amber color of the LED, which is a combination of green and red.

2. Go to any paddle-operated device in your wireless Miro system. Simultaneously press and hold the top and bottom of the paddle until its LED flashes yellow (about 2 seconds).

3. If the LED on the MKFOB is still lit when you complete step 2, it turns green when it receives the House ID, then it begins flashing green.

   If the LED on the MKFOB is not lit, press and hold any button until the LED turns green.

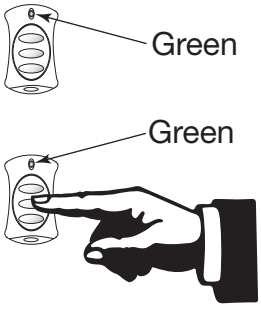


4. Return to the same device used in step 2 above. Simultaneously press and hold the top and bottom of the paddle until its LED changes to solid green (about 2 seconds). All device LEDs should now be solid green.

**For full operational details and access to more features of the MKFOB, see the Installation Instructions that came with the unit. You can also download instructions from the manufacturer's website.**

**Step 2: Open Binding**

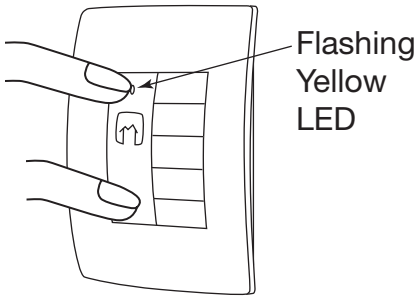


**Step 4: Close Binding**

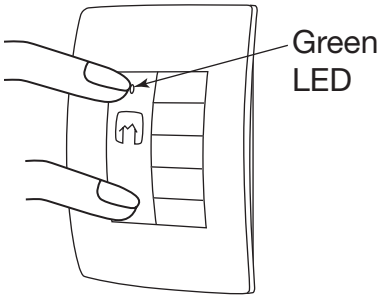


Please Recycle



quick start MKFOBv2 08665r3.indd3 3 1/30/2008 12:12:37 PM