




On-Q  
Discontinued - In-Wall Forward-Phase Universal Dimmer, White  
Part No. DRD4W

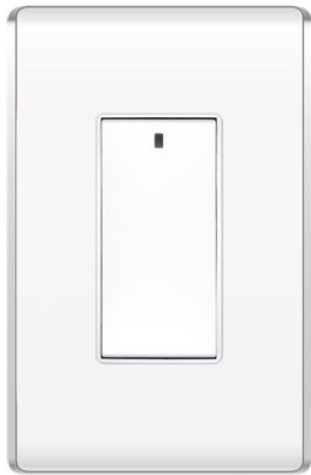

The DRD4 in-wall forward-phase dimmer operates most dimmable lighting types including incandescent, dimmable fluorescent, dimmable LED, dimmable cathode, and neon. As part of the RF Lighting Control System, it can be controlled from other devices located

## Features & Benefits

Patented Top Dog RF communication protocol: 900 MHz radio

No control wiring necessary.

Stores room and house scenes.

5-year warranty.

Patented overload and short circuit protection.

Large surface-mounted antenna ensures maximum broadcast coverage.

Compatible with Decorator wall plates.

Note: Wall plate sold separately from device.

## Specifications

### General Info

|                   |  |                    |              |
|-------------------|--|--------------------|--------------|
| Product Line      | On-Q   | UPC Number         | 754182916290 |
| Country Of Origin | China  | Application Sector | Residential  |
| Standard          | ANSI/UL 1472, CSA-C22.2 No. 184, FCC PART 15 B | Type               | Dimmer       |

### Technical Information

|          |       |                 |             |
|----------|-------|-----------------|-------------|
| Amperage | 5 A   | Number of Poles | Single Pole |
| Wattage  | 600 W | Voltage         | 120.0 V     |