



Legrand/Pass & Seymour NEMA Configuration Table

NEMA Straight Blade Devices										
	15 AMPERE		20 AMPERE		30 AMPERE		50 AMPERE		60 AMPERE	
	RECEPT	PLUG	RECEPT	PLUG	RECEPT	PLUG	RECEPT	PLUG	RECEPT	PLUG
	2 Pole, 2 Wire Non-Grounding	5-15R	5-15P	5-20R	5-20P	5-30R	5-30P	5-50R	5-50P	
2 Pole, 3 Wire Grounding	6-15R	6-15P	6-20R	6-20P	6-30R	6-30P	6-50R	6-50P		
2 Pole, 3 Wire Grounding	7-15R	7-15P	7-20R	7-20P	7-30R	7-30P	7-50R	7-50P		
3 Pole, 3 Wire Non-Grounding			10-20R	10-20P	10-30R	10-30P	10-50R	10-50P		
3 Pole, 4 Wire Grounding	14-20R	14-20P	14-30R	14-30P	14-50R	14-50P	14-60R	14-60P		
4 Pole, 4 Wire Non-Grounding			15-20P	15-20P	15-30R	15-30P	15-50R	15-50P	15-60R	15-60P

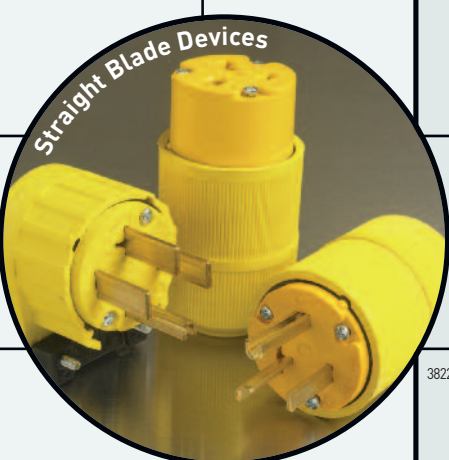

NEMA Turnlok® Devices					
15 AMPERE		20 AMPERE		30 AMPERE	
RECEPT	PLUG	RECEPT	PLUG	RECEPT	PLUG
L1-15R	L1-15P	L2-20R	L2-20P	L5-30R	L5-30P
L5-15R	L5-15P	L5-20R	L5-20P	L5-30R	L5-30P
L6-15R	L6-15P	L6-20R	L6-20P	L6-30R	L6-30P
L7-15R	L7-15P	L7-20R	L7-20P	L7-30R	L7-30P
L8-20R	L8-20P	L8-20R	L8-20P	L8-30R	L8-30P
L9-20R	L9-20P	L9-20R	L9-20P	L9-30R	L9-30P
L10-20R	L10-20P	L10-20R	L10-20P	L10-30R	L10-30P
L11-20R	L11-20P	L11-20R	L11-20P	L11-30R	L11-30P
L12-20R	L12-20P	L12-20R	L12-20P	L12-30R	L12-30P
L13-20R	L13-20P	L13-20R	L13-20P	L13-30R	L13-30P
L14-20R	L14-20P	L14-20R	L14-20P	L14-30R	L14-30P
L15-20R	L15-20P	L15-20R	L15-20P	L15-30R	L15-30P
L16-20R	L16-20P	L16-20R	L16-20P	L16-30R	L16-30P
L17-20R	L17-20P	L17-20R	L17-20P	L17-30R	L17-30P
L18-20R	L18-20P	L18-20R	L18-20P	L18-30R	L18-30P
L19-20R	L19-20P	L19-20R	L19-20P	L19-30R	L19-30P
L20-20R	L20-20P	L20-20R	L20-20P	L20-30R	L20-30P
L21-20R	L21-20P	L21-20R	L21-20P	L21-30R	L21-30P
L22-20R	L22-20P	L22-20R	L22-20P	L22-30R	L22-30P
L23-20R	L23-20P	L23-20R	L23-20P	L23-30R	L23-30P

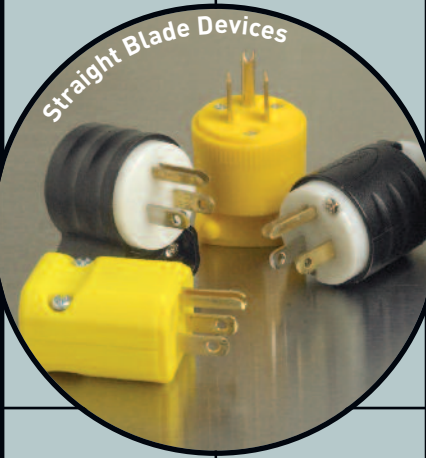

50 Amp Locking Devices		
RECEPT	PLUG	
CR3370 (SR) CR3360 (CI)	CR3361 (PI) CR3377 (FI)	125V CORROSION RESISTANT
CS6370 (SR) CS6360 (CI)	CS6361 (PI) CS6377 (FI)	125V CALIFORNIA STANDARD
CS8269 (SR) CS8264 (CI)	CS8265 (PI) CS8275 (FI)	250V CALIFORNIA STANDARD
CS8469 (SR) CS8464 (CI)	CS8465 (PI) CS8475 (FI)	480V CALIFORNIA STANDARD
3771 (SR) 3762 (CI)	3763-M (PI) 3777 (FI)	600VAC/250VDC CORROSION RESISTANT
CR3369 (SR) CR3364 (CI)	CR3365 (PI) CR3375 (FI)	125/250V CORROSION RESISTANT
CS6369 (SR) CS6364 (CI)	CS6365 (PI) CS6375 (FI)	125/250V CALIFORNIA STANDARD
CS8269 (SR) CS8264 (CI)	CS8265 (PI) CS8275 (FI)	3ø250V CALIFORNIA STANDARD
CS8169 (SR) CS8164 (CI)	CS8165 (PI) CS8175 (FI) CS8177 (FI)	3ø480V CALIFORNIA STANDARD
3769 (SR) 3764 (CI)	3765 (PI) 3775 (FI)	600VAC/250VDC CORROSION RESISTANT
*7279 (SR) *7764 (CI)	*7765 (PI) *7765 (FI)	600VAC/250VDC CORROSION RESISTANT

Angle Adapters			
15 AMPERE	20 AMPERE	30 AMPERE	
EHU15AN	EHU15AN		EHU, 3 Wire
L15-AN	L20303-AN	L20303-AN	Turnlok, 3 Wire
	L203045-AN	L203045-AN	Turnlok, 4 & 5 Wire

Midget Locking Devices			
15 AMPERE			
RECEPT	PLUG		
ML113 (CI) ML114 (FO)	ML1113 (PI) ML1115 (FI)	125V	2 Pole, 2 Wire Non-Grounding
ML213 (CI) ML214 (FO)	ML2113 (PI) ML2115 (FI)	125V	2 Pole, 3 Wire Grounding
ML313 (CI) ML314 (FO)	ML3113 (PI) ML3115 (FI)	125/250V	3 Pole, 3 Wire Non-Grounding

Straight Blade/Locking Adapters		Key	
15 AMPERE		SR	Single Receptacle
L5-15R	L5-15P	DR	Duplex Receptacle
		C	Connector
		P	Plug
		AP	Angle Plug
		AN	Angle Adapter
		FI	Flanged Inlet
		FO	Flanged Outlet
		X, Y, Z	Hot Lead
		W	Neutral Lead
		G	Grounding Lead