


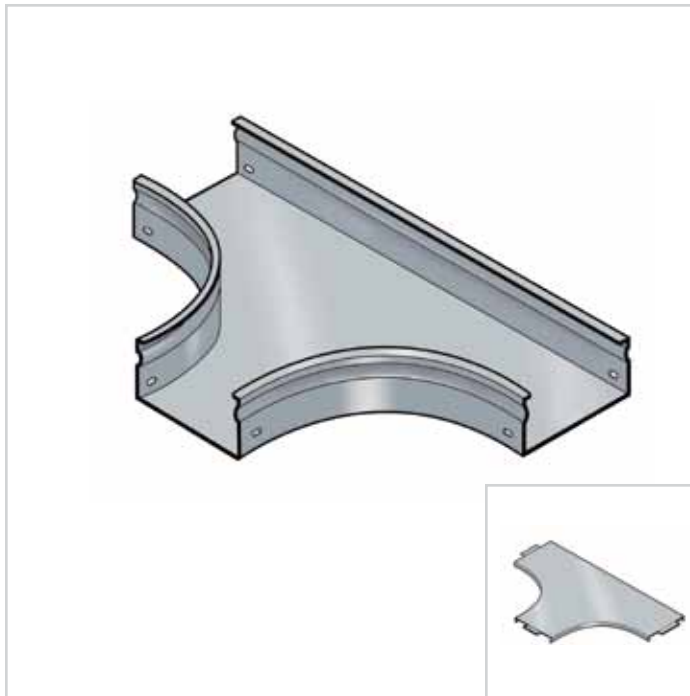


FEATURES

- Strong corrosion resistant steel construction
- Rolled edge for cable protection
- Unique design allows covers to snap on
- 18 gage steel

COMPATIBLE COVER

FTTC

(sold separately)



	TRAY HEIGHT		TRAY WIDTH (W)		RADIUS (R)		LENGTH 1 (L1)		LENGTH 2 (L2)		TANGENT (C)		WEIGHT		PG	BL
	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	LBS	KG	STANDARD	
FTT 50/50	2.0	50	2.0	50	0.8	20	5.9	150	3.9	100	1.2	30	0.6	0.26	340 914	960 022
FTT 50/100	2.0	50	3.9	100	3.9	100	14.2	360	9.1	230	1.2	30	1.7	0.79	340 915	960 023
FTT 50/200	2.0	50	7.9	200	3.9	100	18.1	460	13.0	330	1.2	30	3.0	1.37	340 917	960 024
FTT 50/300	2.0	50	11.8	300	3.9	100	22.0	560	16.9	430	1.2	30	4.7	2.11	340 918	960 025
FTT 100/100	3.9	100	3.9	100	3.9	100	14.2	360	9.1	230	1.2	30	3.7	1.69	340 930	960 026
FTT 100/200	3.9	100	7.8	200	3.9	100	18.1	460	13.0	330	1.2	30	6.2	2.83	340 932	960 027
FTT 100/300	3.9	100	11.8	300	3.9	100	22.0	560	16.9	430	1.2	30	9.8	4.43	340 933	960 028
FTT 100/400	3.9	100	19.7	500	5.9	150	35.4	900	27.6	700	2.0	50	20.8	9.44	340 935	960 029
FTT 100/500	3.9	100	23.6	600	5.9	150	39.4	1000	31.5	800	2.0	50	26.0	11.80	341 936	960 030

FINISHES

SYMBOL	MATERIAL	FINISH & STANDARD
STANDARD	PG	Carbon Steel Pre-Galvanized: Continuous Galvanization Before Fabrication ASTM A 653
	BL	Carbon Steel ASTM A510 Grade 1008 Black Painted: Black Powder Coated ASTM D 3451

Legrand/Cablofil
8319 State Route 4
Mascoutah, IL 62258 USA
1-800-658-4641
618-566-3230
Fax 618-566-3250
www.legrand.us/cablofil