



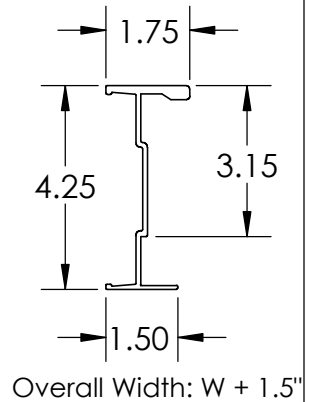

PW Ladder Cable Tray Straight Section

4A20B

4"(H) Side Rail Tray

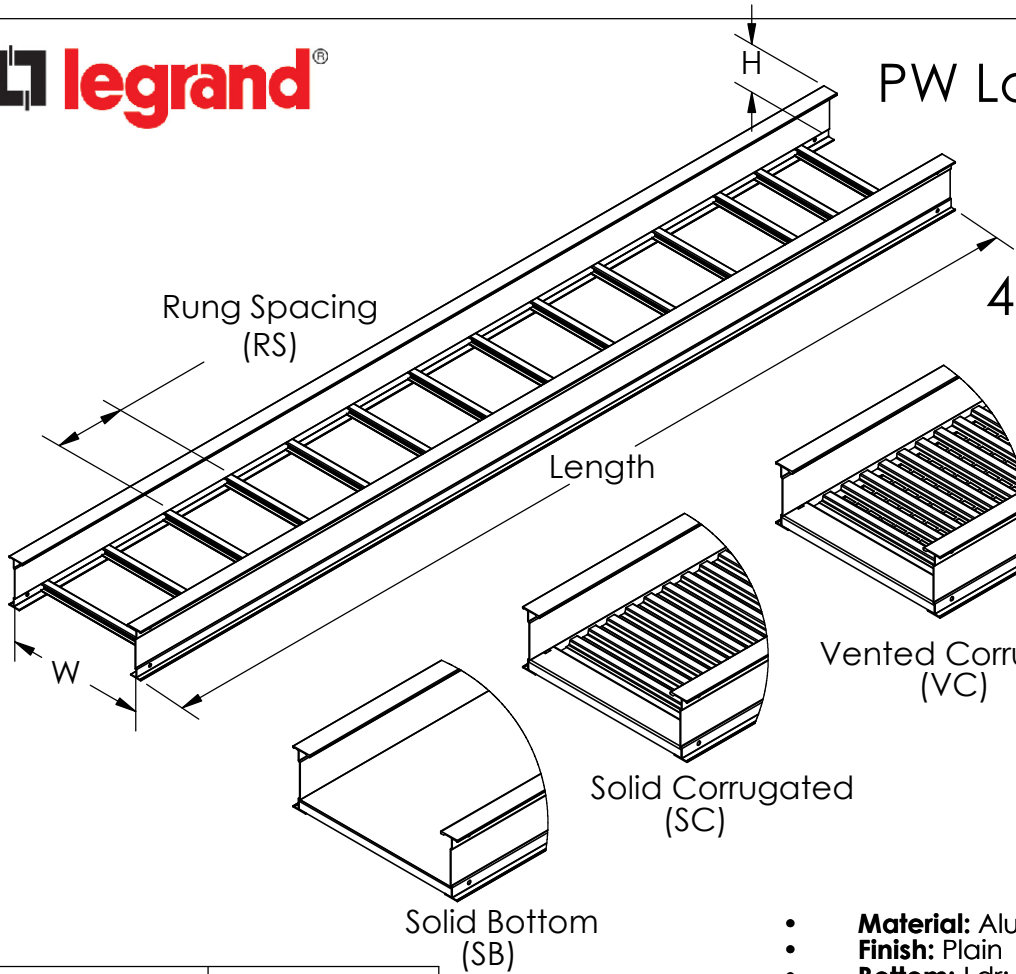

Tray Width (W)	Tray Weight* (LBS./FT.)
6	2.42
9	2.49
12	2.57
18	2.72
24	3.03
30	3.22
36	3.41

* Based on 9" Rung Spacing


- Material:** Aluminum Alloy 6063-T6
- Finish:** Plain
- Bottom:** Ldr: 1" wide I rung
SB: Flat Sheet over 12" Rung Spacing.
SC: Solid Corrugated
VC: Vented Corrugated
- Construction:** Welded
- Tray Design:** Tray construction and markings are per the latest edition of NEMA Standards Publication VE1, CSA C22.2 No. 126.
- Tray Grounding Capability:** Classified as an equipment grounding conductor per NEC 392.60 with a maximum 2000 ampere rating. UL Cross Sectional area: 2.00 in²
- Connectors:** Supplied in pairs with hardware. Splice resistance is less than 0.00033 ohms.
- Mechanical Properties:**
One rail: Ix-x = 2.717 in⁴, Sx-x = 1.103 in³

SUPPORT SPAN (FT.)

6	8	10	12	14	16	18	20	22	24	26	28	30
---	---	----	----	----	----	----	----	----	----	----	----	----

SAFE LOAD DATA (LBS./FT.) / DEFLECTION (IN.) / SAFETY FACTOR 1.5

	469	0.92	300	1.43	208	2.06	153	2.80	117	3.66	93	4.63	75	5.72	61	6.92	50	8.24				
--	-----	------	-----	------	-----	------	-----	------	-----	------	----	------	----	------	----	------	----	------	--	--	--	--

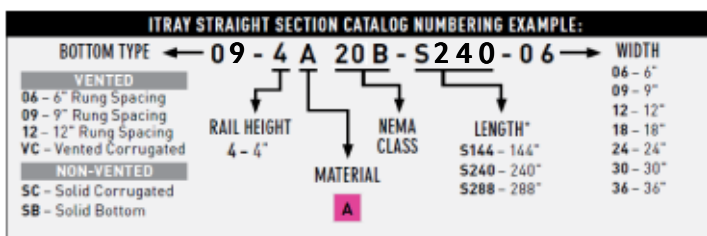

Legrand
8319 State Route 4
Mascoutah, IL 62258 USA
800-658-4641
618-566-3230
Fax 618-566-3250
www.legrand.us/cablofil