


PW Ladder Cable Tray Straight Section

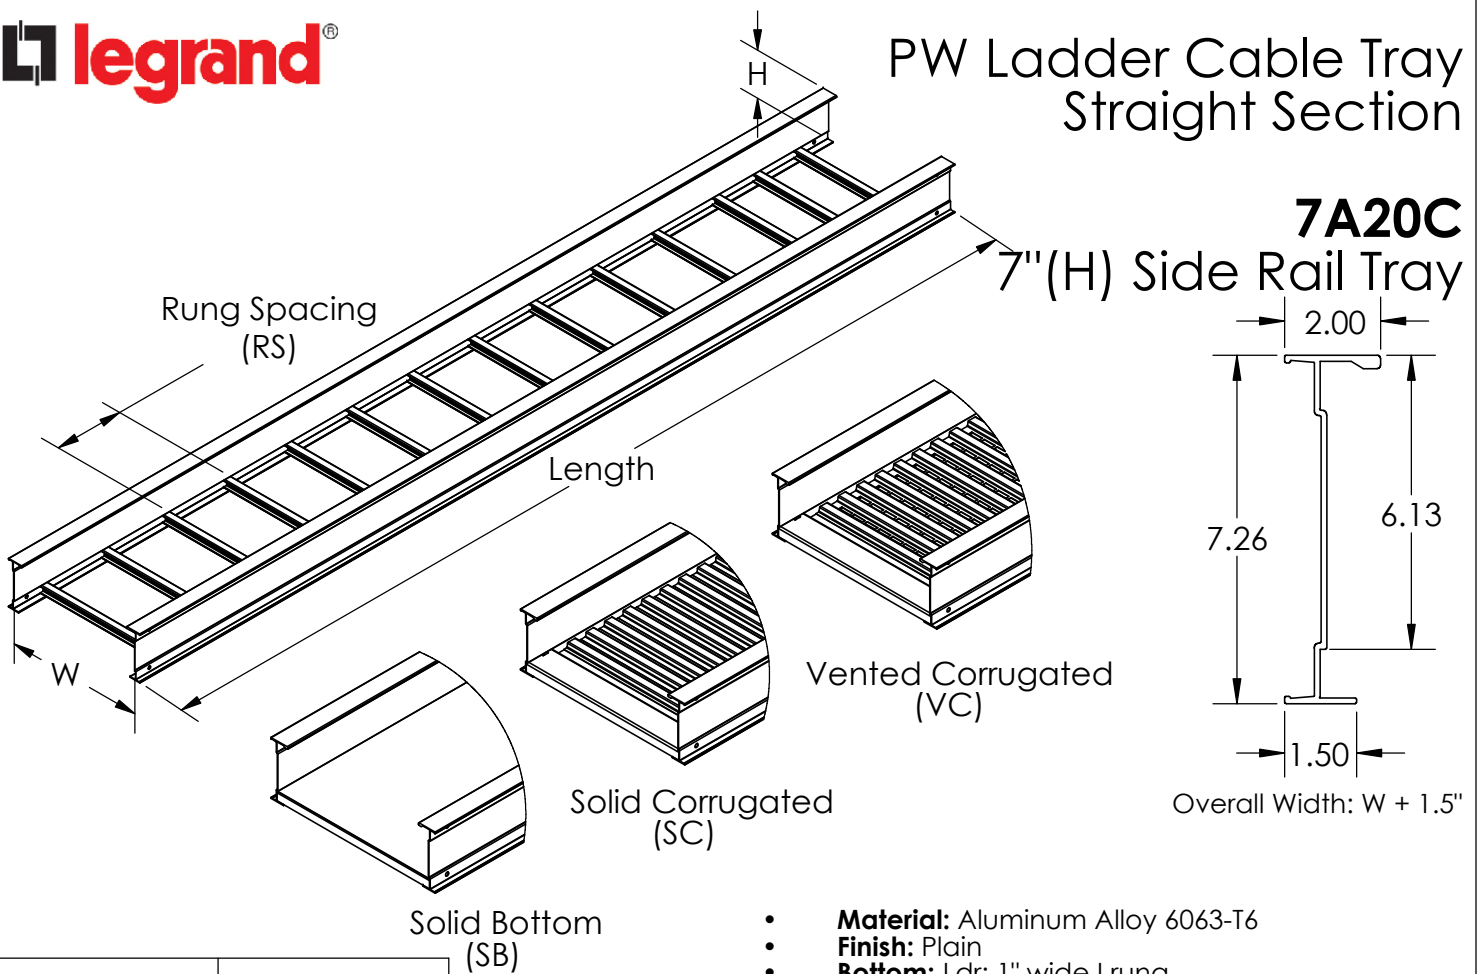


Tray Width (W)	Tray Weight * (LBS./FT.)
6	3.11
9	3.18
12	3.26
18	3.41
24	3.72
30	3.91
36	4.10

* Based on 9" Rung Spacing

- **Material:** Aluminum Alloy 6063-T6
- **Finish:** Plain
- **Bottom:** Ldr: 1" wide I rung
SB: Flat Sheet over 12" Rung Spacing.
SC: Solid Corrugated
VC: Vented Corrugated
- **Construction:** Welded
- **Tray Design:** Tray construction and markings are per the latest edition of NEMA Standards Publication VE1, CSA C22.2 No. 126.
- **Tray Grounding Capability:** Classified as an equipment grounding conductor per NEC 392.60 with a maximum 2000 ampere rating. UL Cross Sectional area: 2.00 in²
- **Connectors:** Supplied in pairs with hardware. Splice resistance is less than 0.00033 ohms.
- **Mechanical Properties:**
One rail: Ix-x = 9.803 in⁴
Sx-x = 2.471 in³

SUPPORT SPAN (FT.)

6	8	10	12	14	16	18	20	22	24	26	28	30									
SAFE LOAD DATA (LBS./FT.) / DEFLECTION (IN.) / SAFETY FACTOR 1.5																					
		400	0.55	278	0.78	204	1.07	156	1.40	123	1.77	100	2.18	81	2.64	66	3.14				

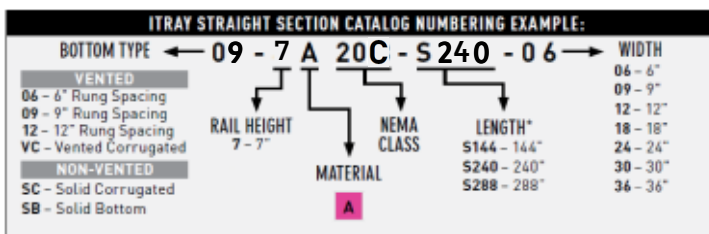

Legrand
 8319 State Route 4
 Mascoutah, IL 62258 USA
 800-658-4641
 618-566-3230
 Fax 618-566-3250
 www.legrand.us/cablofil