legrand®

Pass & Seymour

Split Circuit Receptacles
PlugTail™ Devices
Spec Grade 15 & 20A, 125V

PT5262SC, PT5362SC, PT26262SC, PT26362SC

PlugTail™. The fastest, most consistent and reliable wiring devices – ever.

The PlugTail Split Circuit device is a PlugTail duplex receptacle that can be wired for two separate circuits. These receptacles are pre-wired with a welded second hot lead to provide split circuit capability. Both duplex and Decorator style are available, and both continue to accept the standard PlugTail connector.

Factory-terminated devices and connectors mean that device installation is the same regardless of skill level of the installer. The UL-Listed connectors are keyed to ensure proper wiring installation into each receptacle. The connector simply snaps into the back of the device – no fussing with wires, stripping, or tightening screws. PlugTail devices are finger safe with no exposed terminals, so taping is not required. Now device installation is a snap!

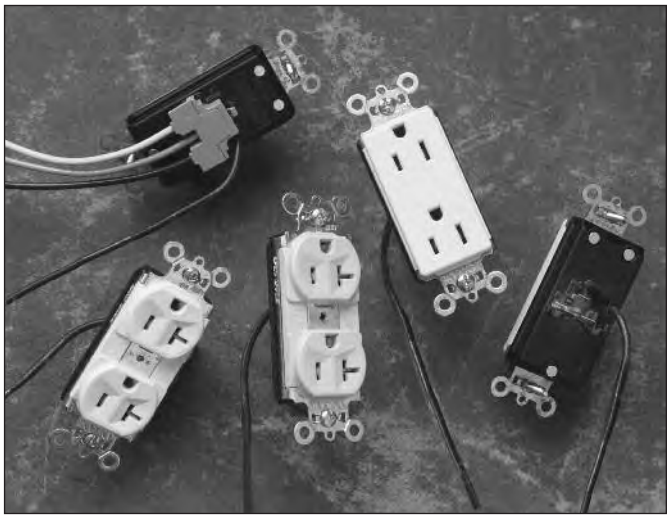

FEATURES & BENEFITS

Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

No exposed terminals create a finger safe application before, during, and after installation.

Auto-ground clip assures positive ground.

Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

.036 inch thick, brass, triple-wipe power contacts for lasting retention.

Three drive screws anchor strap to back body and face.

Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.

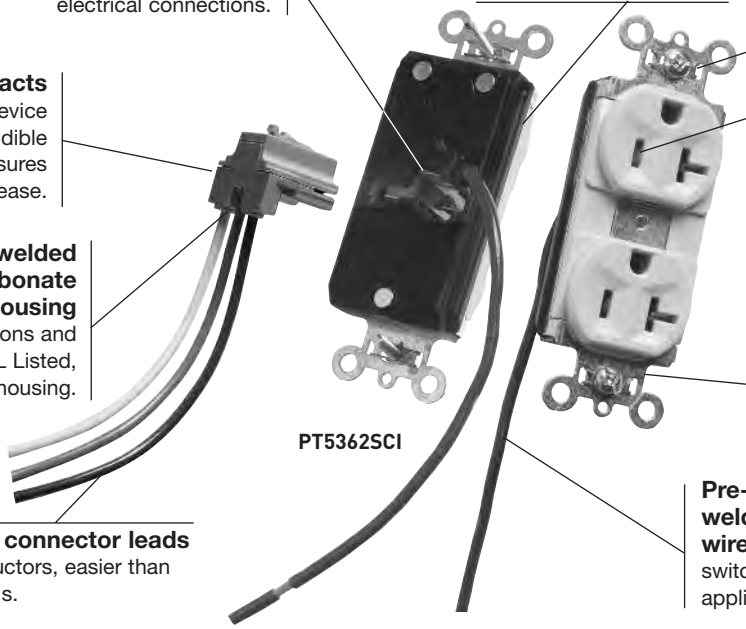

PT5362SCI

Plated steel wrap strap design for maximum durability and corrosion resistance.

Pre-stripped connector leads fasten to conductors, easier than standard pigtails.

Pre-wired with one welded pre-stripped wire lead to facilitate switched receptacle circuit applications.

FIELD USES/VERTICAL MARKETS

- Pre-Fabrication
- Institutional
- Multiple Dwelling
- Hospitality/Lodging

legrand®
Pass & Seymour

Split Circuit Receptacles
PlugTail™ Devices
Spec Grade 15 & 20A, 125V

ORDERING INFORMATION

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.
Duplex Receptacles with 6" Lead				
PT5262SCI	15	125	Ivory	5-15R
PT5262SCW	15	125	White	5-15R
PT5262SC	15	125	Brown	5-15R
PT5262SCGRY	15	125	Gray	5-15R
PT5262SCBK	15	125	Black	5-15R
PT5262SCRED	15	125	Red	5-15R
PT5262SCLA	15	125	Light Almond	5-15R
PT5262SCBL	15	125	Blue	5-15R
PT5362SCI	20	125	Ivory	5-20R
PT5362SCW	20	125	White	5-20R
PT5362SC	20	125	Brown	5-20R
PT5362SCGRY	20	125	Gray	5-20R
PT5362SCBK	20	125	Black	5-20R
PT5362SCRED	20	125	Red	5-20R
PT5362SCLA	20	125	Light Almond	5-20R
PT5362SCBL	20	125	Blue	5-20R

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.
Decorator Receptacles with 6" Lead				
PT26262SCI	15	125	Ivory	5-15R
PT26262SCW	15	125	White	5-15R
PT26262SC	15	125	Brown	5-15R
PT26262SCGRY	15	125	Gray	5-15R
PT26262SCBK	15	125	Black	5-15R
PT26262SCRED	15	125	Red	5-15R
PT26262SCLA	15	125	Light Almond	5-15R
PT26362SCI	20	125	Ivory	5-20R
PT26362SCW	20	125	White	5-20R
PT26362SC	20	125	Brown	5-20R
PT26362SCGRY	20	125	Gray	5-20R
PT26362SCBK	20	125	Black	5-20R
PT26362SCRED	20	125	Red	5-20R
PT26362SCLA	20	125	Light Almond	5-20R

NEMA 5-15R

NEMA 5-20R

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6SOL	Solid	6"
PTRA6STR	Stranded	6"
PTRA6SOLB25	Solid	25"
PTRA6STRB25	Stranded	25"
PlugTail Connectors – Right Angle with WAGO Connectors		
PTRA6SOLBP	Solid	6"
PTRA6STRBP	Stranded	6"
PlugTail Connectors – Right Angle with Ground Screw		
PTRA6SOLG	Solid	6"
PTRA6STRG	Stranded	6"

For more information on these and other P&S products refer to our Catalog or visit our web site.

PlugTail™ Devices
Split Circuit Receptacles
Spec Grade 15 & 20A, 125V

legrand®
Pass & Seymour

TECHNICAL SPECIFICATIONS

3rd Party Compliance

cULus Listed, File Number E140596, Standard UL498.
Federal Specification WC596.
Conforms to NEMA WD-1 and WD-6.

Performance

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30° C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL92 V2
Operating Temperature	Maximum continuous +60°C to, minimum -40°C without impact

PlugTail Receptacle Materials

Face	Nylon	Line Contacts	.036 688 Brass
Integral Ground System	.036 260 Brass	Auto Ground Clip	Steel
Back Body	PVC	Mounting Strap	.042 Zinc-Plated Steel
Assembly Drive Screw	Zinc-Plated Steel	Mounting Screws	Tri-Drive Steel

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	.030 Brass

Warranty

1 Year

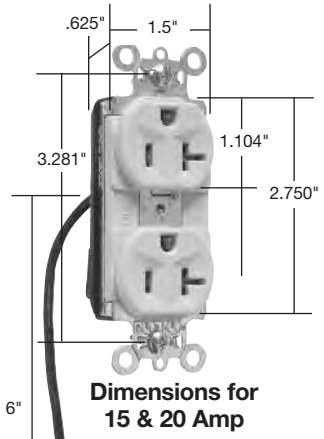

Dimensions for 15 & 20 Amp

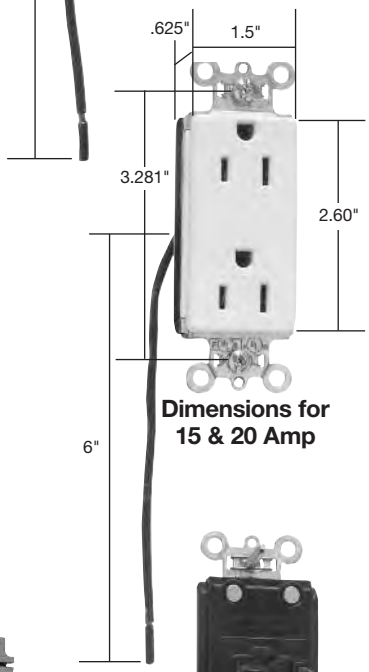

Dimensions for 15 & 20 Amp

PTRA6STR PTRA6STRBP PTRA6STRG

COMPLEMENTARY DEVICES & ACCESSORIES

PLUGTAIL™ DEVICES

- Extra Heavy-Duty Spec Grade
- Extra Heavy-Duty Hospital Grade
- Extra Heavy-Duty Tamper-Resistant

STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Hard Use
- Construction Grade
- Construction Grade Leaded
- Commercial Grade

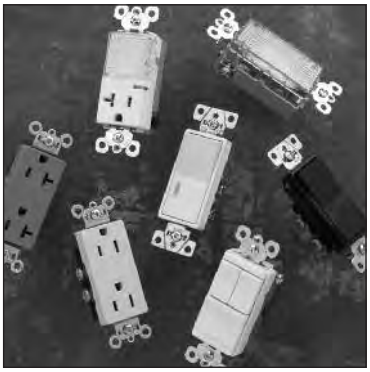

DECORATOR DEVICES

- Construction Grade Switches
- Specification Grade Combo Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Specification Grade Hallway Lights

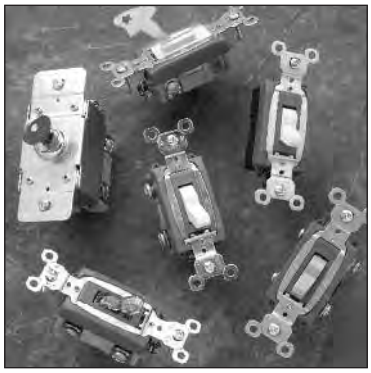

SWITCHES

- Heavy-Duty Toggle
- Heavy-Duty Lighted Toggle
- Heavy-Duty Security
- Heavy-Duty Locking
- Construction Grade Toggle
- Commercial Grade Toggle

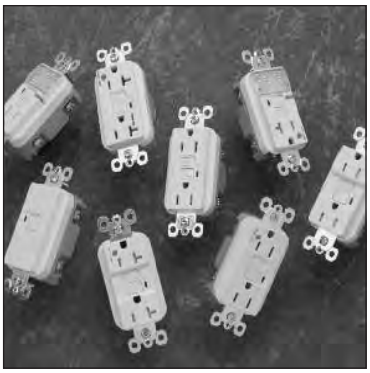

GFCIs

- Specification Grade

WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Screwless Polycarbonate
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

ALSO AVAILABLE...

- Hospital Grade Devices
- TVSS & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- Bulk Solutions

legrand®

Legrand/Pass & Seymour
P.O. Box 4822
Syracuse, NY 13221-4822
800-223-4185

North America Headquarters
60 Woodlawn Street
West Hartford, CT 06110
Phone: 1.877.BY.LEGRAND (295.3472)
Fax: 1.860.232.2062
www.legrand.us

Legrand Canada
570 Applewood Crescent
Vaughan, ON, L4K 4B4
Phone: 905.738.9195
Fax: 905.738.9721
www.legrand.ca

SF1512R2 – Updated August 2009 – For latest specs visit www.legrand.us/passandseymour

© 2011, Legrand/Pass & Seymour EWS/GGXTP