

### COMPANY OVERVIEW

**• Sustainability built in to support our associates, customers, and the environment**

At Legrand North and Central America, we're committed to leading by example within our own operations, to developing high quality solutions for our customers' High Performance Buildings, and to transforming how people live and work – more safely, more comfortably, more efficiently.

**• Better Performance**

A core principle of designing for sustainability drives us to innovate products and systems that enable buildings to reach exceptional levels of performance, bringing about industry-leading ideas, inventions and initiatives.

**• Better Operations**

A commitment to a leadership role in operational excellence through environmental management, optimizing the way we manage energy, water and waste.

**• Better Lives**

A dedication to enhancing employee and community welfare through programs that help people enjoy healthier, more productive and more rewarding lives.

For more information on Legrand's PEPs and other sustainability initiatives, visit [legrand.us/sustainability](http://legrand.us/sustainability).



### LEGRAND'S ENVIRONMENTAL COMMITMENTS

**• Incorporate environmental management into our industrial sites**

Of all Legrand sites worldwide, over 85% are ISO 14001 certified (sites belonging to Legrand for more than five years).

**• Offer our customers environmentally friendly solutions**

Develop innovative solutions to help our customers design more energy efficient, better managed and more environmentally friendly installations.


**• Involve the environment in product design**

Reduce the environmental impact of products over their whole life cycle.

Provide our customers with all relevant information (composition, consumption, end of life, etc.).



### REFERENCE PRODUCT

<b>Function</b>	Connects equipment using two RJ45 connectors and transmits between them a communication signal on 1 m of cable according to TIA 568C.2-2009 cabling standard for Category 6a during a 10 year typical lifetime.
<b>Reference Product</b>	<div style="text-align: center;">  <p>Representative product shown.</p> </div> <p>Part Number: 00691                  CAT6A Snagless UTP Patch Cord, 3 ft, blue</p>

The company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in the document are for guidance and cannot be held binding on the company.

# Product Environmental Profile

## C2G UTP Patch Cords



### PRODUCTS CONCERNED

The environmental data is representative of the following product types: Snagless, Non-booted, Slim patch cords.



### CONSTITUENT MATERIALS

This Reference Product contains no substances prohibited by the regulations applicable at the time of its introduction to the market. It respects the restrictions on use of hazardous substances as defined in the RoHS directive 2011/65/EC and does not contain, as far as we know, any substance on the candidate list at the time the PEP was published for authorization of the REACH regulation (EC) no. 1907/2006 with a concentration above 0.1% w/w.

<b>Total weight of Reference Product with unit packaging</b>	<b>69.9 g</b>
--	---------------

Plastics as % of weight		Metals as % of weight		Others as % of weight	
Product					
PVC	46.1%	Copper Alloys	15.8%		
PE	10.3%	Aluminium	2.3%		
PC	3.7%				
PP	2.9%				
PET	2.9%				
Packaging					
PE	15.9%			Paper	<0.1%
<b>Total plastics</b>	<b>81.8%</b>	<b>Total metals</b>	<b>18.1%</b>	<b>Total others</b>	<b>&lt;0.1%</b>

Estimated recycled material content: 5% of weight.

Due to variable cable diameters and the absence of cable components, the proportions of PVC, Copper Alloys, PET, Aluminium, and PE (packaging) vary from the Reference Product values shown above for the product types outlined in the table below. All other material proportions are the same as shown above for the Reference Product.

Product Type	PVC	Copper Alloys	PET	Aluminium	PE (packaging)
CAT 6 & 5E Snagless	44%	25%	0%	0%	14%
CAT 6 & 5E Non-booted	27%	35%	0%	0%	21%
CAT 6 & 5E Slim	23%	30%	0%	0%	30%



### MANUFACTURING

The Reference Product comes from a site that observes the applicable legislation for industrial sites.



### DISTRIBUTION

Products are distributed from logistics centers located to optimize transport efficiency using EPA SmartWay® certified carriers to reduce greenhouse gases emissions. Information on the distance of distribution is not available so the PCR hypothesis for "Intercontinental transport", 2175 miles (3500 km) by heavy truck, was used. This represents transportation of the Reference Product from our warehouse to the local point of distribution in the North American market.

# Product Environmental Profile

## C2G UTP Patch Cords



### INSTALLATION

No electricity is required for installing the Reference Product.



### USE

**Servicing and maintenance:**

Under normal conditions of use, this type of product requires no servicing or maintenance.

**Consumable:**

No consumables are necessary to use this type of product.



### END OF LIFE

**Hazardous waste\* contained in the product:** no hazardous waste  
[\*] Hazardous waste as defined by European Commission decision 2000/532/EC.

**Recycling rate:**

Calculated using the method described in the IEC/TR 62635 technical report, the recyclability rate of the Reference Product without packaging is estimated as 96%. This value is based on data collected from a technological channel using industrial procedures. It does not pre-validate the effective use of this channel for end-of-life electrical and electronic products.

Separated into:	(% mass of Reference Product without packaging)
- plastic materials (excluding packaging):	75%
- metal materials (excluding packaging):	22%

Recycling rate of packaging (all types of materials): <1%

The recycling rate for all product types represented in the PEP is equivalent to the Reference Product's rate of 96%, despite varying proportions of plastic, metal, and packaging materials.



### ENVIRONMENTAL IMPACTS

The evaluation of environmental impacts examines the stages of the Reference Product life cycle: manufacturing, distribution, installation, use, and end of life. It is representative of products marketed and used in North America.

The following modelling elements were taken into account:

<b>Manufacturing</b>	Packaging taken into account up to first level packaging. As required by the PEP ecopassport program, all transport for the manufacturing of the Reference Product, including materials and components, has been taken into account. The waste generated during manufacturing phase has been taken into account.
<b>Distribution</b>	Transport between the last distribution center and an average delivery to the sales area. The default scenario modelled maximizes the environmental impact.
<b>Installation</b>	The end of life of the packaging (11 g) is taken into account at this phase. Transport of packaging to end of life treatment.
<b>Use</b>	<ul style="list-style-type: none"> <li>Under normal conditions of use, this type of product requires no servicing or maintenance.</li> <li>No consumables are necessary to use this type of product.</li> <li>Use scenario: 10 year working life operating 25% of the time, according to the LAN - tertiary (commercial) application defined in Annex 1 of PSR0001. The energy dissipation through the connectors is calculated according to PSR0005 for RJ45 Balanced Connectors. This modelling duration does not constitute a minimum durability requirement.</li> <li>Energy model: Electricity(US) - 2009</li> </ul>
<b>End of life</b>	PSR0001 was used as a guideline for the end of life scope based on communication and data cable. The Reference Product is transported locally 621.37 miles (1000km) by truck. Metal and plastic materials undergo separation and grinding. 100% of the metals are transported locally 621.37 miles (1000km) by truck to a manufacturing site for reuse after grinding and all other materials, not including packaging, are disposed of at a landfill.
<b>Software used</b>	EIME V5 and its database "CODDE-2015-04" and the indicators defined in the PCR ed 3 in alignment with the EN15804 standard

# Product Environmental Profile


## C2G UTP Patch Cords



### ENVIRONMENTAL IMPACTS (continued)

	Total for Life cycle		Raw material and manufacturing		Distribution		Installation		Use		End of life	
	Value	Unit	Value	%	Value	%	Value	%	Value	%	Value	%
<b>Global warming (GW)</b>	4.74E-01	kg CO <sub>2</sub> eq.	2.54E-01	54%	1.22E-02	3%	1.34E-03	< 1%	1.70E-01	36%	3.69E-02	8%
<b>Ozone depletion (OD)</b>	2.55E-08	kg CFC-11 eq.	2.09E-08	82%	2.47E-11	< 1%	3.42E-11	< 1%	3.08E-09	12%	1.48E-09	6%
<b>Acidification of soil and water (A)</b>	1.14E-03	kg SO <sub>2</sub> eq.	8.87E-04	78%	5.47E-05	5%	5.10E-06	< 1%	1.63E-04	14%	3.06E-05	3%
<b>Water eutrophication (WE)</b>	2.16E-04	kg PO <sub>4</sub> <sup>3-</sup> eq.	1.43E-04	66%	1.26E-05	6%	5.81E-06	3%	4.29E-05	20%	1.13E-05	5%
<b>Photochemical ozone creation (POCP)</b>	1.06E-04	kg C <sub>2</sub> H <sub>4</sub> eq.	7.29E-05	69%	3.89E-06	4%	3.98E-07	< 1%	2.60E-05	25%	2.98E-06	3%
<b>Depletion of abiotic resources - elements (ADPe)</b>	3.12E-04	kg Sb eq.	3.12E-04	100%	4.87E-10	< 1%	8.62E-11	< 1%	1.67E-09	< 1%	7.88E-10	< 1%
<b>Total use of primary energy (PE)</b>	8.58E+00	MJ	5.93E+00	69%	1.63E-01	2%	1.42E-02	< 1%	2.29E+00	27%	1.89E-01	2%
<b>Net use of fresh water (FW)</b>	3.69E-03	m <sup>3</sup>	3.36E-03	91%	1.09E-06	< 1%	1.18E-06	< 1%	3.00E-04	8%	3.26E-05	< 1%
<b>Depletion of abiotic resources - fossil fuels (ADP<sub>f</sub>)</b>	7.98E+00	MJ	4.95E+00	62%	1.71E-01	2%	1.91E-02	< 1%	2.69E+00	34%	1.52E-01	2%
<b>Water pollution (WP)</b>	8.58E+01	m <sup>3</sup>	3.41E+01	40%	2.00E+00	2%	1.51E-01	< 1%	8.37E+00	10%	4.12E+01	48%
<b>Air pollution (AP)</b>	1.13E+02	m <sup>3</sup>	9.65E+01	86%	4.99E-01	< 1%	1.59E-01	< 1%	1.44E+01	13%	9.37E-01	< 1%

The values of the 27 impacts defined in the PCR-ed3-EN-2015 04 02 are available in the digital database of pep-ecopassport.org website. The environmental impacts of the Reference Product are representative of the products covered by the PEP, which therefore constitute a homogeneous environmental family.

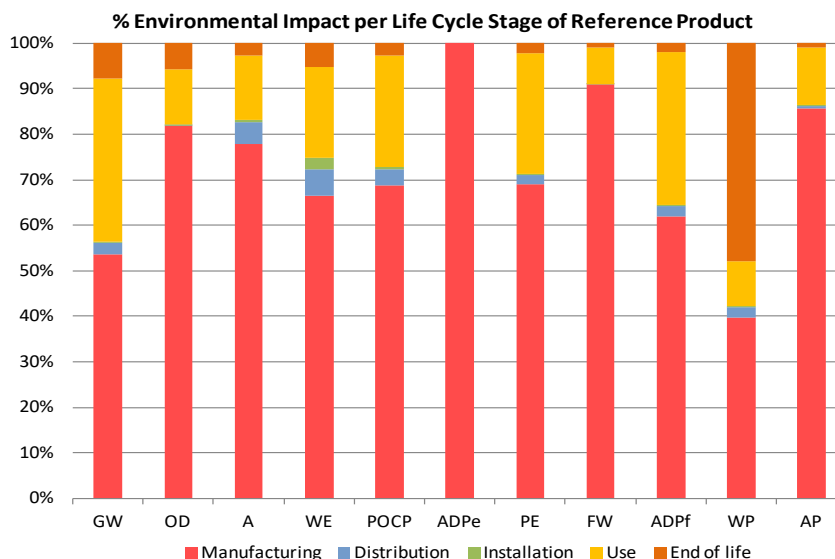

The environmental impact of the Reference Product occurs predominantly during the manufacturing phase.

# Product Environmental Profile

## C2G UTP Patch Cords



### ENVIRONMENTAL IMPACTS (continued)

For products other than the Reference Product, the environmental impacts can be estimated by weighting the environmental impacts of the Reference Product by the values shown in the table below. Impacts for Distribution are proportional to the mass of the Reference Product. Impacts for Installation are the same for all product types. Impacts for Use are proportional to the electrical dissipation based on the cable category. Impacts for End of Life are proportional to the mass of the cable in the Reference Product.

The values are based on the default length of a 3 ft patch cord. To extrapolate different lengths of patch cord, multiply the values in the table below by a scale factor corresponding to the desired length relative to 3 feet (ie. for a 20 ft patch cord multiply the values by 20/3 or 6.7; for a 5 ft patch cord multiply by 5/3 or 1.7). The impacts for a pack of multiple patch cords can be calculated by multiplying the impacts of the applicable product type by the number of patch cords provided in the pack. For example, for a 25-pack of Non-booted CAT 6 patch cords, multiply the impacts for CAT 6 Non-booted below by 25.

Product Type	Manufacturing	Distribution	Use	End of Life
CAT 6A Snagless	1.0	1.0	1.0	1.0
CAT 6 Snagless	AP & FW: 1.6 all else: 1.0	1.1	0.5	1.2
CAT 5E Snagless	ADPe: 1.7 A: 0.6 AP & FW: 1.3 all else: 0.9	1.0	0.3	0.9
CAT 6 Non-booted	AP & FW: 1.4 all else: 0.7	0.8	0.5	1.1
CAT 5E Non-booted	ADPe & FW: 1.3 AP: 1.1 all else: 0.6	0.7	0.3	0.9
CAT 6 Slim	AP & FW: 0.9 all else: 0.5	0.6	0.5	0.7
CAT 5E Slim	ADPe & FW: 0.8 AP: 0.7 all else: 0.4	0.5	0.3	0.5

Registration number: LGRP-00466-V01.02-EN	Drafting rules: "PCR-ed3-EN-2015 04"
Verifier's accreditation number: VH02	Information and reference documents: <a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
Date of issue: 06-2017	Validity period: 5 years
Independent verification of the declaration and data, in compliance with ISO 14025:2010 Internal <input checked="" type="checkbox"/> External <input type="checkbox"/>	
The PCR Review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN).	
The elements of the present PEP cannot be compared with elements from another program.	
Document in compliance with ISO 14025:2010: "Environmental labels and declarations - Type III environmental declarations"	
In compliance with ISO 14040:2006: "Environmental management - LCA - Principles and framework"	
In compliance with ISO 14044:2006: "Environmental management - LCA - Requirements and guidelines"	
In alignment with EN 15804:2012+A1:2013: "Sustainability of construction works - EPD's - Core rules for the product category of construction products"	