PW Ladder Cable Tray Straight Section

5A12C
5"(H) Side Rail Tray

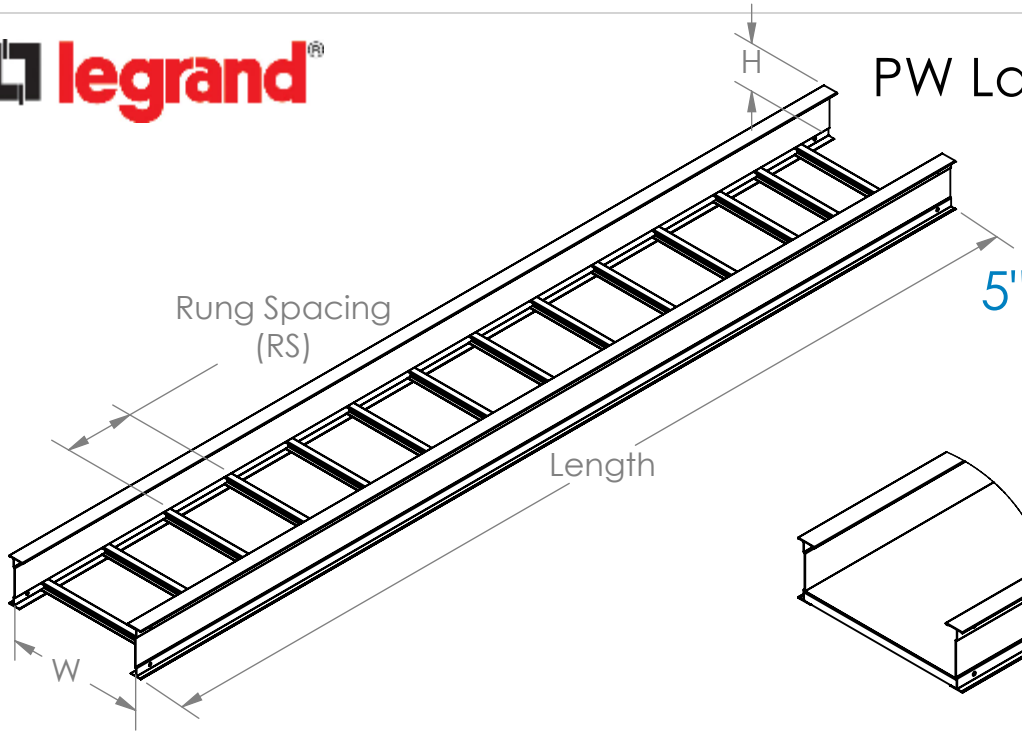



Solid Bottom
(SB)

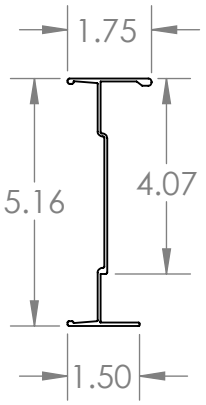

Overall Width: W + 1.5"

Tray Width (W)	Tray Weight * (LBS./FT.)
6	1.68
9	1.75
12	1.83
18	1.98
24	2.29
30	2.48
36	2.67

* Based on 9" Rung Spacing

- **Material:** Aluminum Alloy 6063-T6
- **Finish:** Plain
- **Bottom:** Ldr: 1" wide I rung
  SB: Flat Sheet over 12" Rung Spacing
- **Construction:** Welded
- **Tray Design:** Tray construction and markings are per the latest edition of NEMA Standards Publication VE1, CSA C22.2 No. 126.
- **Tray Grounding Capability:** Classified as an equipment grounding conductor per NEC 392.60 with a maximum 1200 ampere rating. UL Cross Sectional area: 1.00 in^2
- **Connectors:** Supplied in pairs with hardware. Splice resistance is less than 0.00033 ohms.
- **Mechanical Properties:**
  One rail: Ix-x = 2.288 in^4, Sx-x = 0.859 in^3

SUPPORT SPAN (FT.)													
6	8	10	12	14	16	18	20	22	24	26	28	30	
SAFE LOAD DATA (LBS./FT.)/ DEFLECTION (IN.) / SAFETY FACTOR 1.5													
410	0.22	243	0.40	156	0.63	108	0.91	76	1.24	57	1.62		

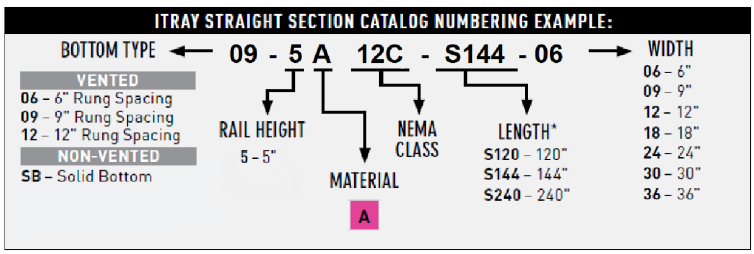

Copyright © 2013 Cablofil, Inc.
CABCS1108.C - IT 5A12C

Legrand
8319 State Route 4
Mascoutah, IL 62258 USA
800-658-4641
618-566-3230
Fax 618-566-3250
www.legrand.us/cablofil