

CABLE CLEATS – Strong cable restraint without cable sheath damage

Cablofil cable cleats are designed to restrain cables from lateral and torsional forces supported by ladder tray. In vertical applications, cable cleats provide axial strain relief to cables without damaging the cable sheath. Cablofil heavy-duty cable cleats enclose the cable and the ladder rung with a rigid hi-strength interlocking frame that protects high, medium and low voltage cables from mechanical damage resulting from short circuits.



Cablofil cable cleats are made from a polyamide resin that is electrically insulating, flame resistant and resistant to most chemicals. They are a superior restraint for high voltage cables over nylon and stainless steel cable ties that can harm cable sheathing and break in extreme short circuit instances, damaging the cables and in some instances the ladder tray.

FEATURES


- Rigid Design
- Installs Quickly
- Fits Any Rung
- Polyamide Resin Body
- Large Clamping Area
- Strain Relief
- Universal Design
- Third Party Tested

BENEFITS


- Suitable for continued use after exposure to short circuits
- Designs for single or trefoil conductors
- Protects against damage to cables and ladder tray
- Patented in US and Canada
- Two-piece design uses four stainless steel bolts with flanged nuts included
- Internal gripping hardware is held captive during installation
- Accommodates most ladder cable tray rungs and channel strut
- Includes an adhesive-backed, neoprene rung spacer
- Features electrically insulating properties
- Resistant to UV and most chemicals including drilling mud
- Suitable for salt and gaseous atmospheres
- Suitable for indoor or wet locations
- Low smoke, zero-halogen, zero-phosphorous
- Low mechanical pressure exerted on cables
- Axial Grip for cable in vertical runs
- Restrains against lateral and torsional forces
- Accommodates virtually every cable tray rung
- Design for single or triple conductors
- Meets multiple codes and standards including, ASTM, IEC, ISO and UL

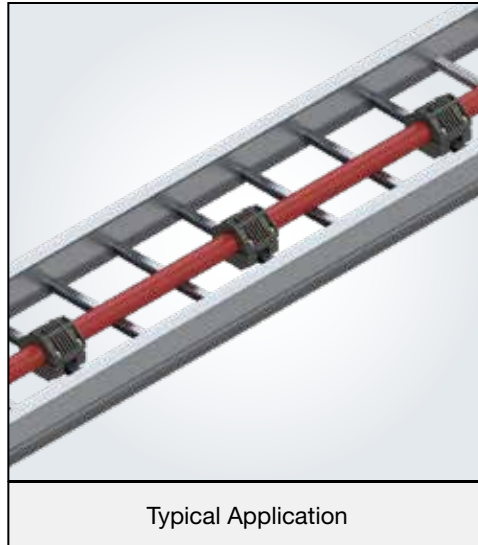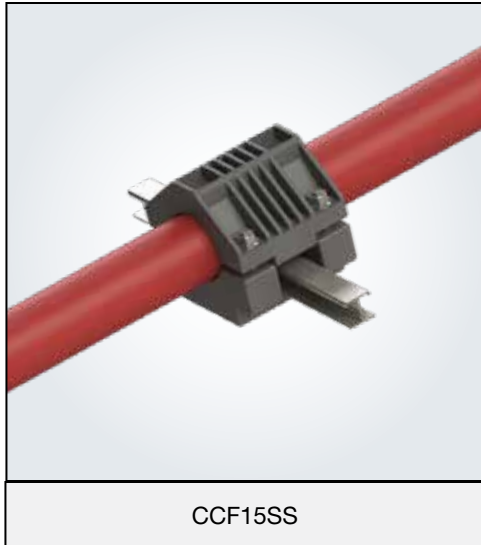


- Restrains single conductor, high-voltage cables
- Accommodates virtually every type of cable tray rung, including I-beam, elliptical, square and channel strut
- Combined depth of the rung and rung spacer is 1.08" to 1.18"
- Choice of standard 304 or optional 316 Stainless Steel 5/16" bolts with flange nuts

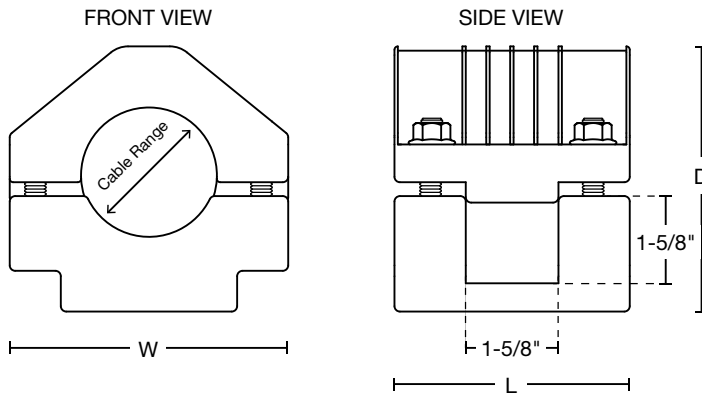

PRODUCT NO.	NO. OF CABLES	CABLE RANGE		BOLT FINISH	DIMENSIONS			WEIGHT LBS
		MIN IN	MAX IN		LENGTH IN	WIDTH IN	DEPTH IN	
CCF15SS4C30	SINGLE	1.34	1.54	304 SS	4	5	4	1.3
CCF15SS4C20		1.50	1.85	304 SS	4	5	4	1.3
CCF15SS4C10		1.75	2.09	304 SS	4	5	4	1.3
CCF15SS4		2.00	3.125	304 SS	4	5	4	1.3
CCF15SS6C30		1.34	1.54	316 SS	4	5	4	1.3
CCF15SS6C20		1.50	1.85	316 SS	4	5	4	1.3
CCF15SS6C10		1.75	2.09	316 SS	4	5	4	1.3
CCF15SS6		2.00	3.125	316 SS	4	5	4	1.3
CCF15SS4C40		1.20	1.40	304SS	4	5	4	1.3

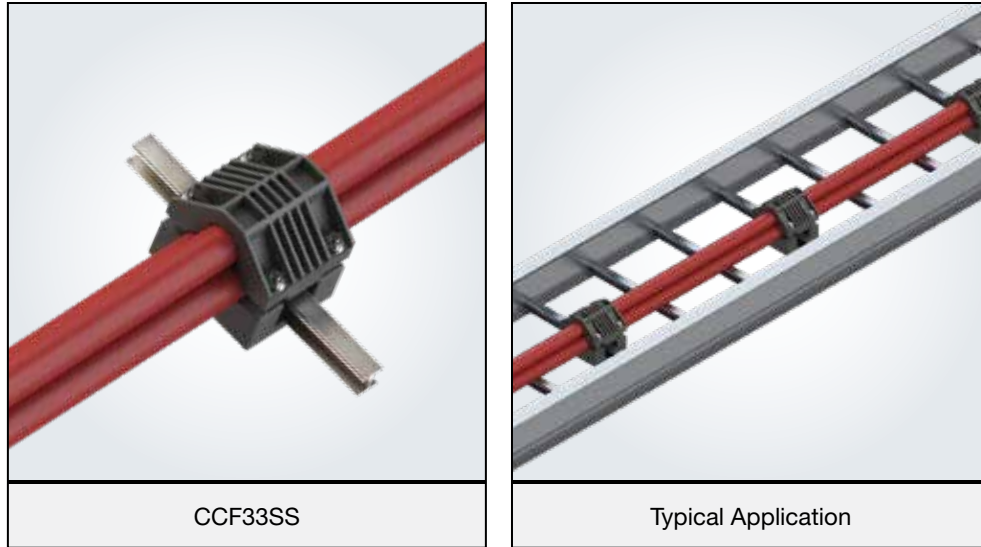

- Restrains 3 conductors, high-voltage cables
- Accommodates virtually every type of cable tray rung, including I-beam, elliptical, square and channel strut
- Choice of standard 304 or optional 316 Stainless Steel 5/16" bolts with flange nuts

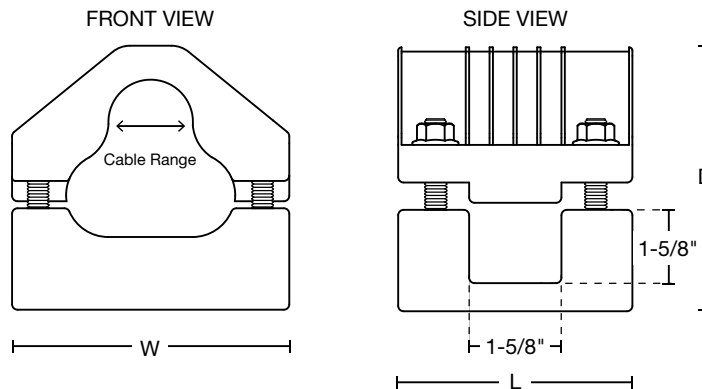

PRODUCT NO.	NO. OF CABLES	CABLE RANGE		BOLT FINISH	DIMENSIONS			WEIGHT LBS
		MIN IN	MAX IN		LENGTH IN	WIDTH IN	DEPTH IN	
CCF33SS4	TREFOIL	1.18	1.54	304 SS	6	6	4	1.3
CCF34SS4		1.46	1.85	304 SS	6	6	4	1.5
CCF35SS4		1.77	2.28	304 SS	7	7	5	1.7
CCF36SS4		2.20	2.80	304 SS	7	7	5	2.1
CCF33SS6		1.18	1.54	316 SS	6	6	4	1.3
CCF34SS6		1.46	1.85	316 SS	6	6	4	1.5
CCF35SS6		1.77	2.28	316 SS	7	7	5	1.7
CCF36SS6		2.20	2.80	316 SS	7	7	5	2.1
CCF33SS4C20**		0.48	1.90	304 SS	6	6	4	1.3

*Cable range per cable
**Includes C20 pads

Follow these steps for quick and simple cable cleat installation!

Cable Cleat — Single Cable

STEP 1

Install rung spacer if required



STEP 2

Position base and wire



STEP 3


Position cap and finger tighten all four nuts. Then 1/2 turn with wrench.



Cable Cleat — Trefoil

STEP 1

Install rung spacer if required

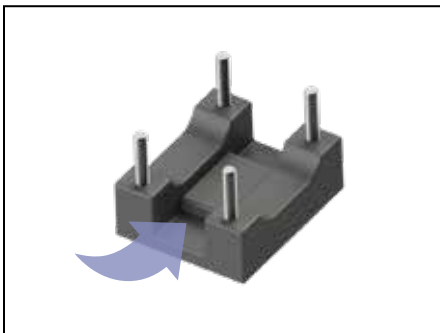

STEP 2

Position base and wire in a triangle formation



STEP 3

Position cap and finger tighten all four nuts. Then 1/2 turn with wrench.



NOTE: All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



NOTE: The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.



Legrand, North America
60 Woodlawn Street
West Hartford, CT 06110
1.877.BY.LEGRAND (295.3472)
www.legrand.us

Canada
905.738.9195
www.legrand.ca

FOLLOW US

