

**Catalog Number • Numéro de Catalogue • Número de Catálogo: HBEM3W**

Country of Origin: Made in China • Pays d'origine: Fabriqué en Chine • País de origen: Hecho en China


## SPECIFICATIONS

Maximum extension .....	4.75" (120mm)
Parts included:	
2 chase nipples, 2 nuts, rubber washer,	
1 knockout cover	
Chase nipple inner diameter .....	0.63" (16mm)
Threaded outside diameter .....	0.82" (20mm)

## DESCRIPTION AND OPERATION

The HBEM3W Extender Module allows you to attach an HB3xxW series IP65 compliant occupancy sensor to the side of a wet location light fixture.

The HBEM3W includes two chase nipples; one for use with the HB340W and one for all other models. One end of the nipple snaps into the extender housing. The other end fits into a watertight fixture enclosure with a standard knockout. A rubber washer fits between the outside flange of the nipple and the outside of the fixture. The included nut tightens against the inside wall of the fixture enclosure to secure the nipple and rubber washer.

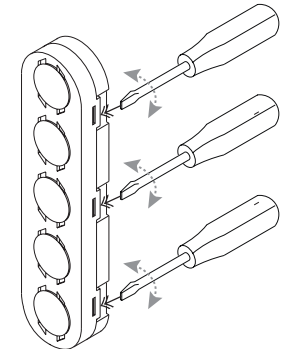

Slide blade under tabs located in 3 places. Gently pry apart.

The extender module snaps apart to allow threading the wiring cable through it and into the fixture for connection.


The extender housing is not watertight, but the inner flange rings on the nipple and the HB3xxW housing fit into grooved rubber rings on the cable to keep moisture from entering the fixture and sensor at those locations.

**⚡ WARNING: TURN THE POWER OFF AT THE CIRCUIT BREAKER BEFORE WIRING. ⚡**

## INSTALLATION

Assemble the HBEM3W to the HB3xxW series sensor and to the light fixture as shown in the illustrations.

Note the grooved rubber ring on the sensor cable. Ensure you have selected the correct nipple for your sensor. Make sure that when the cable is threaded through the chase nipple, the slot is seated on either side of the flange ring inside the chase nipple, as shown in the exploded view. When properly seated, using moderate force you should not be able to pull the cable out of the nipple from either end.

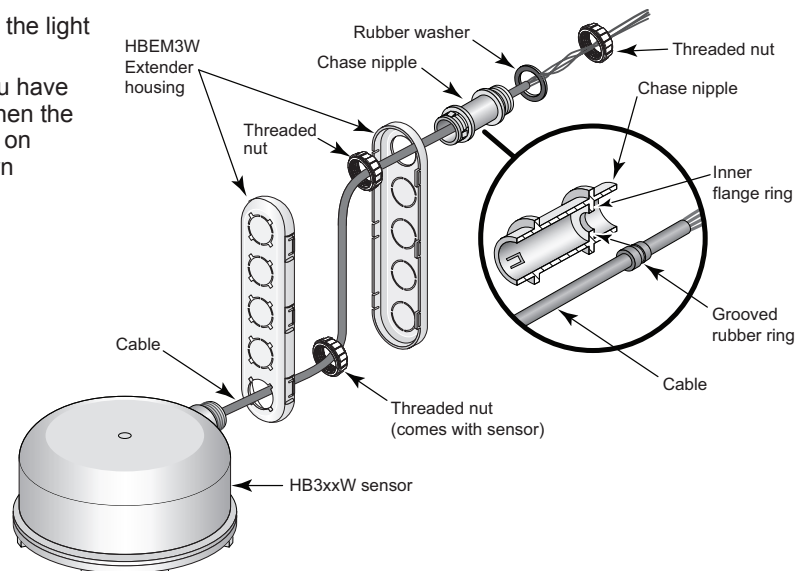

---

**WARRANTY INFORMATION**

Wattstopper warrants its products to be free of defects in materials and workmanship for a period of five (5) years. There are no obligations or liabilities on the part of Wattstopper for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue or profit, or cost of removal, installation or reinstallation.

**INFORMATIONS RELATIVES À LA GARANTIE**

Wattstopper garantit que ses produits sont exempts de défauts de matériaux et de fabrication pour une période de cinq (5) ans. Wattstopper ne peut être tenu responsable de tout dommage consécutif causé par ou lié à l'utilisation ou à la performance de ce produit ou tout autre dommage indirect lié à la perte de propriété, de revenus, ou de profits, ou aux coûts d'enlèvement, d'installation ou de réinstallation.

**INFORMACIÓN DE LA GARANTÍA**

Wattstopper garantiza que sus productos están libres de defectos en materiales y mano de obra por un período de cinco (5) años. No existen obligaciones ni responsabilidades por parte de Wattstopper por daños consecuentes que se deriven o estén relacionados con el uso o el rendimiento de este producto u otros daños indirectos con respecto a la pérdida de propiedad, renta o ganancias, o al costo de extracción, instalación o reinstalación.

---