




Wattstopper Retrofit kit for GE 48 relay SWS or TLC relay panel Part No. LMCP-GE48

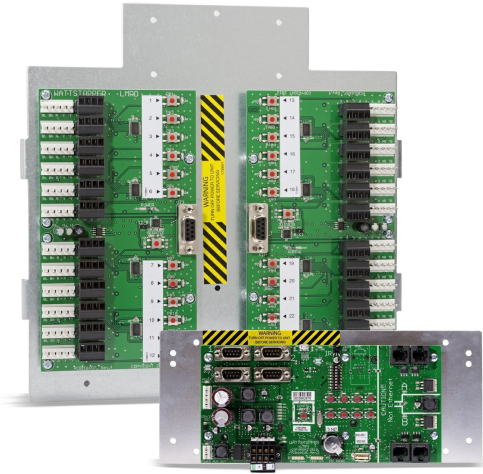

The LMCP retrofit kits provide a simple upgrade option to existing Wattstopper Lighting Integrator and other legacy relay panels (GE and Horton Controls SWC, SWS, SWSP and TLC panels). The kit is compatible with several common lighting relays, including HDR, RR7, and RR9. With the intelligence cards, the panel is fully compatible with the DLM technology platform and enables an optional MS/TP network.

Features & Benefits

DLM panel intelligence upgrades legacy relay panels without new wiring or relay replacement

Easy setup via LMCT-100 handheld configuration tool

Compatible with several commercially available and installed lighting relays

Native BACnet MS/TP connectivity

Can connect to Digital Lighting Management switches, sensors and input devices

Specifications

General Info

Product Line	Wattstopper	Color	Nickel
Finish	Unfinished	UPC Number	754182936090
Country Of Origin	China	Product Series	LMCP
Installation Location	Panel	Works With	Common Lighting Relays (HDR, RR7, RR9), GE TLC Panels, Horton Controls Panels, Series SWC, SWS, SWSP Panels
Application Sector	Commercial	Standard	BACnet
Warranty Type	5-Year	Type	Relay Panel

Dimensions

Product Width US	9.8 in	Product Weight US	5.5 lb
------------------	--------	-------------------	--------

Product Volume US	518.6 cu in	Product Depth US	5.4 in
-------------------	-------------	------------------	--------

Product Height US	9.8 in
-------------------	--------

Additional Information

RoHS Compliant	Yes
----------------	-----

Technical Information

Operating Temperature Min	32 °F	Output Voltage	24 VDC
---------------------------	-------	----------------	--------

Timer Type	Astronomical	Bus Power Supply	250 mA @ 24 VDC, Class 2
------------	--------------	------------------	--------------------------

Operating Temperature Max	131 °F	Topology	Free Topology
---------------------------	--------	----------	---------------

Number of Relays	48	Indicator	Configuration LED, Group Status LED, Load Status LED, Network Status LED, Power LED, Service LED
------------------	----	-----------	--

Input Voltage	120/240/277/347 V	Line Frequency	50 Hz, 60 Hz
---------------	-------------------	----------------	--------------

Indoor/Outdoor	Indoor	Mounting Type	Screw Holes
----------------	--------	---------------	-------------

Operating Temperature	0°-55°C, 32°-131°F	Operating Humidity	5-95% RH (Non-Condensing)
-----------------------	--------------------	--------------------	---------------------------

Wire Connection Type	RJ-45	Storage Temperature	23° - 176° F
----------------------	-------	---------------------	--------------
