




**Wattstopper**  
**Discontinued - DLM Dimming Wall Switch, Pre-Eng 1-Button, ON/OFF w/Arrows, Ivory**  
Part No. LMDM-101-I-ENG1

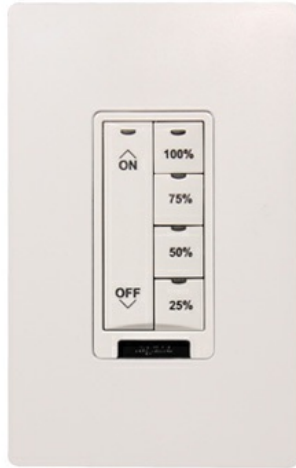

The LMDM-101 Digital Dimming Wall Switch is a low voltage device for dimming control of one or more lighting loads. It is part of a Digital Lighting Management (DLM) system and can dim load(s) connected to DLM dimming room controllers and switch load(s) connected to DLM on/off room controllers.

## Features & Benefits

### 1-Button Dimming Wall Switch

It is part of a Digital Lighting Management (DLM) system and can dim load(s) connected to DLM dimming room controllers and switch load(s) connected to DLM on/off room controllers

Plugs to other components using Cat 5e cable and RJ45 connectors eliminating wiring errors

Active Dim feature enables temporary adjustment of any selected load

Plug n' Go automatic configuration and Push n' Learn for personalization

The LMDM-101 Digital Dimming Wall Switch is a low voltage device for dimming control of one or more lighting loads

Low voltage switch for control of dimmable loads

LED bar graph indicates relative light level of controlled load

IR transceiver for wireless configuration and remote control

## Specifications

### General Info

Product Line	Wattstopper	Color	Ivory
UPC Number	754182946662	Country Of Origin	China
Product Series	LMDM	Switch Type	Push
Number of Switches	1	Application Sector	Commercial
Standard	UL	Warranty Type	5-Year
Type	Dimmer, Switch		

---

## Dimensions

---

Product Width US	1.8 in	Product Weight US	0.2 lb
Product Volume US	20.1 cu in	Product Depth US	1.6 in
Product Height US	4.1 in		

---

## Technical Information

---

Operating Temperature Min	0 °C	Compatibility	DLM Wired
Has Battery	No	Number of Connections	2
Operating Temperature Max	55 °C	Number of Buttons	1
Number of Rockers	0	Input Voltage	24 VDC
Indoor/Outdoor	Indoor	Mounting Type	J-Box
Current Draw	5 mA	Operating Temperature	0°-55°C, 32°-131°F
Operating Humidity	5-95% RH (Non-Condensing)	Wire Connection Type	RJ-45
Engraving Type	Text		

---