




**Wattstopper**  
**Discontinued - DLM PIR Pre-Eng 2-Button Wall Mount Sensor, ON/OFF, Lt. Almond**  
Part No. LMPW-102-LA-ENG1

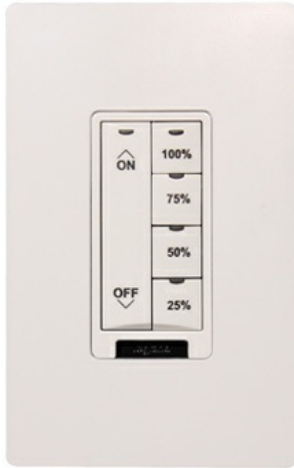

LMPW-100 Series Digital PIR Wall Switch Occupancy Sensors use passive infrared (PIR) technology to detect occupancy for energy-efficient control of lighting and plug loads. They also include one or two switch buttons for manual control of selected loads, and are part of a Wattstopper Digital Lighting Management (DLM) system

## Features & Benefits

2-button Digital PIR Wall Switch Occupancy Sensor

LMPW-100 Series Digital PIR Wall Switch Occupancy Sensors use passive infrared (PIR) technology to detect occupancy for energy-efficient control of lighting and plug loads

They also include one or two switch buttons for manual control of selected loads, and are part of a Wattstopper Digital Lighting Management (DLM) system

Passive infrared sensor with On/Off button(s) to switch selected load(s)

Component of Digital Lighting Management integrated control system

Quick access to Push n' Learn for system personalization

Digital sensor with LCD display and programming pushbuttons

IR transceiver for wireless configuration and remote control

Plug to other components using Cat 5e cables with RJ45 connectors eliminating wiring errors

## Specifications

### General Info

Product Line	Wattstopper	Color	Light Almond
Finish	Glossy	UPC Number	754182947119
Country Of Origin	China	Product Series	LMPW-100
Features	Adjustable Time Delay, Indicator Lights, Load Controller Required, Sensitivity Adjustment	Switch Type	Motion Sensor, Push
Number of Switches	2	Installation Location	Wall

Included	Mounting Screws	Application Sector	Commercial
Standard	UL, cUL, FCC part 15, RoHS	Warranty Type	5-Year
Type	Sensor, Switch		

### Dimensions

Product Width US	1.8 in	Product Weight US	0.2 lb
Product Volume US	20.3 cu in	Product Depth US	1.9 in
Product Height US	4.2 in		

### Technical Information

Operating Temperature Min	32 °F	Timer Type	Digital
Compatibility	DLM Wired, Infrared Wireless	Has Battery	No
Sensor Coverage Pattern	180 deg	Sensor Type	Occupancy
Operating Temperature Max	131 °F	Sensor Mounting Height	4 ft
Number of Buttons	2	Number of Rockers	0
Sensor Technology	Passive Infrared (PIR)	Timer Duration	1-30 Minutes
Topology	Free Topology	Indicator	Button LED, PIR Detection LED, Sensor Binding (PNL) LED
Input Voltage	24 VDC	Indoor/Outdoor	Indoor
Mounting Type	In-Wall	On Function	Selectable Auto/Manual
Current Draw	8 mA	Operating Temperature	0°-55°C, 32°-131°F
Operating Humidity	5-95% RH (Non-Condensing)	Sensing Range	40 ft radius
Wire Connection Type	RJ-45	Engraving Type	Text
Storage Temperature	23° - 176° F, -5° - 80° C		