


Catalog Numbers • Les Numéros de Catalogue • Los Números de Catálogo: EN-WTT-ZB

Country of Origin: Made in Canada • Pays d'origine: Fabriqué en Canada • País de origen: Hecho en Canadá

DESCRIPTION

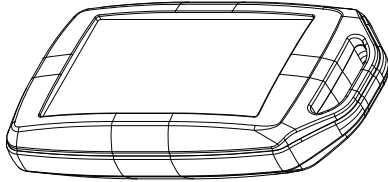

The wiring test tool is a key-fob-sized device designed for installers and contractors to test the wiring of Wattstopper PLUS wireless devices. It helps lighting manufacturers validate installing integrated load controllers such as the CLM and SensiLUM at the end of a manufacturing line before shipping to the site. In addition, it helps electrical contractors to test devices such as the WCM, WALC, and WSLC at a site.

USING THE WIRING TEST TOOL


The wiring test tool can control devices at two different ranges (Normal and High), which can be used depending on the type of installation at the site.

The wiring test tool allows an installer to test the installation of their wireless devices by sending a command to toggle and dim the lighting nearby. For commercial applications like offices, schools, and healthcare, press the button labeled "NORMAL" to trigger the test sequence for all luminaires in the vicinity to follow a pre-programmed OFF/ON/DIM Down/Up sequence.

For applications with a high ceiling height like warehouses, press the button labeled "HIGH" to trigger the test sequence. The primary difference between the two options is the signal strength emitted by the test tool.

NOTES:


- Frequent use of HIGH button may lead to shorter battery life.
- Luminaires that have successfully joined the wireless network upon commissioning will not respond to Wiring Test Tool button presses.

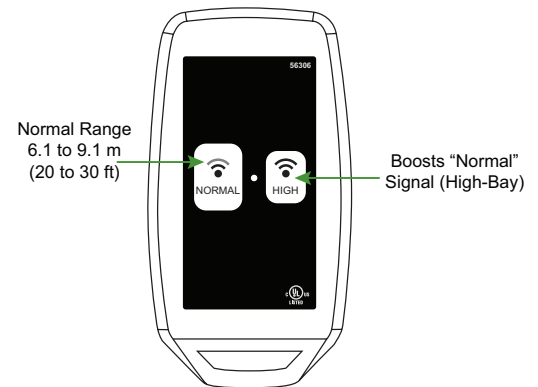

PRODUCT SAFETY

When using electrical equipment, basic safety precautions should always be followed, including the following:

- Keep away from children. Do not disassemble and do not dispose in fire. Dispose of the product at the end of its life cycle in accordance with local regulations.
- Properly dispose used batteries.
- Risk of fire, explosion, or burns. Do not recharge, crush, disassemble, heat above 100°C (212°F), incinerate.

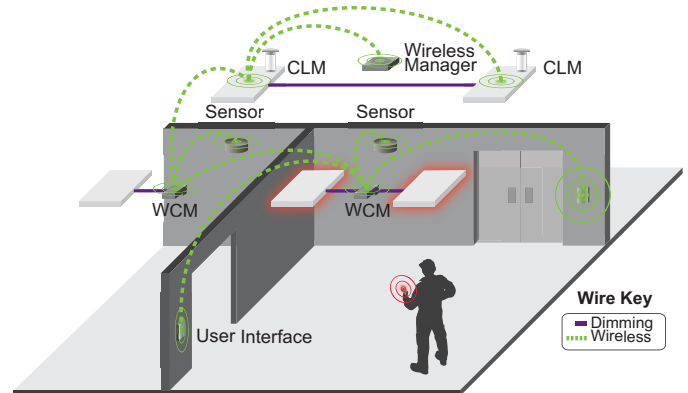

WARRANTY INFORMATION

Wattstopper warrants its products to be free of defects in materials and workmanship for a period of five (5) years. There are no obligations or liabilities on the part of Wattstopper for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue or profit, or cost of removal, installation or reinstallation.

INFORMATIONS RELATIVES À LA GARANTIE

Wattstopper garantit que ses produits sont exempts de défauts de matériaux et de fabrication pour une période de cinq (5) ans. Wattstopper ne peut être tenu responsable de tout dommage consécutif causé par ou lié à l'utilisation ou à la performance de ce produit ou tout autre dommage indirect lié à la perte de propriété, de revenus, ou de profits, ou aux coûts d'enlèvement, d'installation ou de réinstallation.

INFORMACIÓN DE LA GARANTÍA

Wattstopper garantiza que sus productos están libres de defectos en materiales y mano de obra por un período de cinco (5) años. No existen obligaciones ni responsabilidades por parte de Wattstopper por daños consecuentes que se deriven o estén relacionados con el uso o el rendimiento de este producto u otros daños indirectos con respecto a la pérdida de propiedad, renta o ganancias, o al costo de extracción, instalación o reinstalación.