AU7002 LyriQ Digital Audio Input Module

Doc. #1507207 05/14 Rev C

Installation Instructions

Catalog Number(s) Country of Origin: Made in China •

AU7002

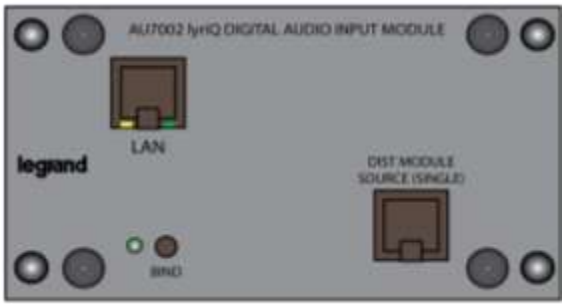

The **AU7002** streams digital media content, acting as a source input for the lyriQ distributed audio system.

INSTALLATION INSTRUCTIONS
Please read these instructions completely before you begin.

1 PHYSICAL INSTALLATION

In the enclosure, run a Cat 5 jumper cable from the "Distribution Module Source (Single)" jack of the **AU7002** to the single source input jack of the lyriQ distribution module (AU1002 shown). Also run a Cat 5 jumper/cable from the "LAN" jack to a switch/router device.

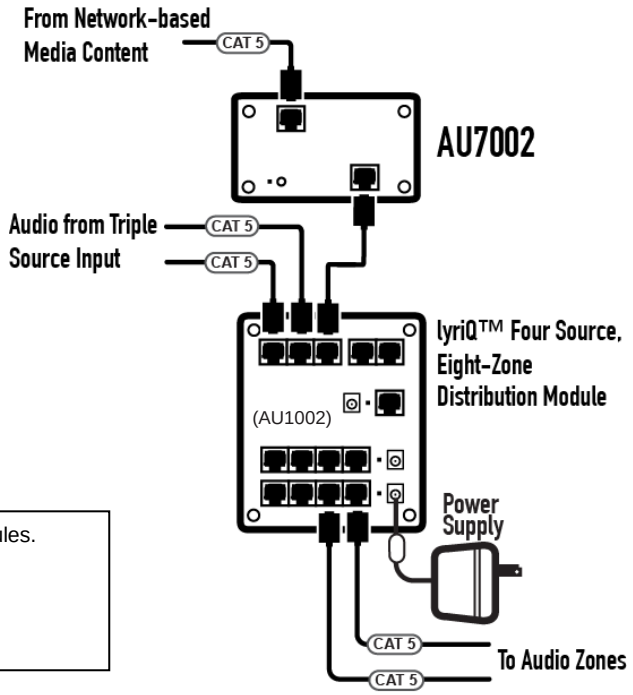

This device is verified to comply with Part 15 Class B of the FCC Rules.

2a CONFIGURATION / BINDING

Using a smart device (Apple iPhone/iPad or Android), download and run the app "NuVo Player". The first screen should appear as shown to the right.
Press the top selection "Set up my new system" to begin.
NOTE: Bottom selection does not function and should not be selected.

2b

If the middle selection “Control my system” was pressed by mistake (before **AU7002** has been bound to system) the screen at the right will be displayed.
Simply press “Reset Controller” selection, or wait for the screen to time out.
NOTE: Do not click on link shown on this screen.

2c

Assuming the top selection “Set up my new system” was selected in step 2a above, the first screen to the right will be shown. Press the “I do not have a NuVo Gateway” selection at the bottom of the page. When the screen to far right is shown, press the “I understand, continue” selection at the bottom of the page.

2d

Since you haven’t yet bound the **AU7002** to the system, it doesn’t see any zones. Just press the “Next” selection to move to the next screen. At this point the **AU7002** should have been installed and power applied, so its LED should be lit green. Just press the “Next’ selection once again.
NOTE: Ignore the product picture.

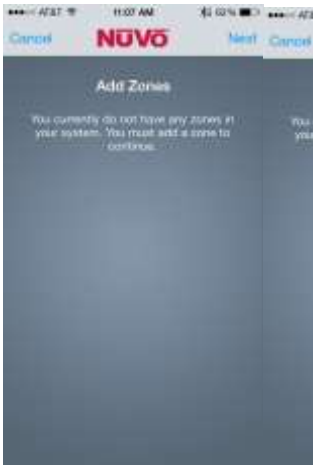

Doc. #1507207 05/14 Rev C

© Copyright 2014 Legrand All Rights Reserved.

860.233.6251
1.877.BY.LEGRAND
www.legrand.us
www.legrand.ca

2e

Ignore the pictures again, and press/release the "**Bind**" button on the front of the **AU7002** to bind it to the lyriQ system. Once the bind is complete, the screen on the far right is shown. Press the "Next" selection, as the binding operation is complete. The AU7002 LED will change to white.

3a

CONFIGURATION / ADDING A ZONE

Next you will be asked to name the zone, enter a name then press the "Next" selection. On the next screen press the "Done" button (You will not be adding another Zone when using the AU7002).

3b

Next you will need to select your location. After selecting your location pres "Next" to advance to the registration screen. You can choose "Later" or enter your information then press "Register".

Next you will be taken to the "Setup Complete" page. Press "Finish" then you will be taken to the control app.

Doc. #1507207 05/14 Rev C

© Copyright 2014 Legrand All Rights Reserved.

860.233.6251
1.877.BY.LEGRAND
www.legrand.us
www.legrand.ca

4a

OPERATION / PLAYING MUSIC

To activate your new zone, click and drag your zone icon onto the area above the icon. The “Pause House” icon in the upper right corner may be pressed when you want to pause the music coming from the **AU7002**. A pop-up (shown on the far right) allows you to “Pause All”, but it is really only pausing the music coming through the **AU7002**.

4b

When you press the “Select Music” area at the top of the screen on step 4a (or press the “Music Library” selection from the Settings screen), you will be taken to the Library page shown just to near right. The “Play demo song” selection does not function. You can select from a variety of streaming music at the bottom of the page, or add your own music server by downloading the Nuvo Music Share software (at www.nuvotechnologies.com under support) to a PC/laptop. If you did press the “Play demo song” selection by mistake, you’ll have to wait around 10 seconds for this error screen on the far right to pop up before you can leave that screen (press the “Home icon”).

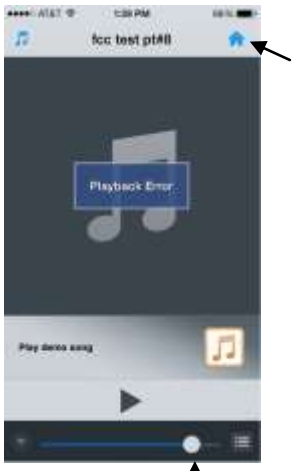

Volume should be set to @ 75% for optimized sound quality.
Tapping the volume button on the slider toggles Mute on and off.

4c

Each streaming music provider’s screens will be unique, but if you chose “TuneIn”, it will take you through the typical choices to eventually find the music you want to listen to. To stop the music, press the “Stop” button, or select the “House icon” to return to the main page to make other selections.

Doc. #1507207 05/14 Rev C

© Copyright 2014 Legrand All Rights Reserved.

860.233.6251
1.877.BY.LEGRAND
www.legrand.us
www.legrand.ca

5a

OPERATION / TROUBLESHOOTING
FONCTIONNEMENT / DÉPANNAGE
OPERACIÓN / SOLUCIÓN DE PROBLEMAS

Notice that from the main screen, you can see which streaming music selection you have made and even its current status (play/pause/stop). Pressing the "Settings (gears)" selection at the bottom of the screen takes you to the screen on the far right. "Music Library/Services" and "General" are applicable to the AU7002.

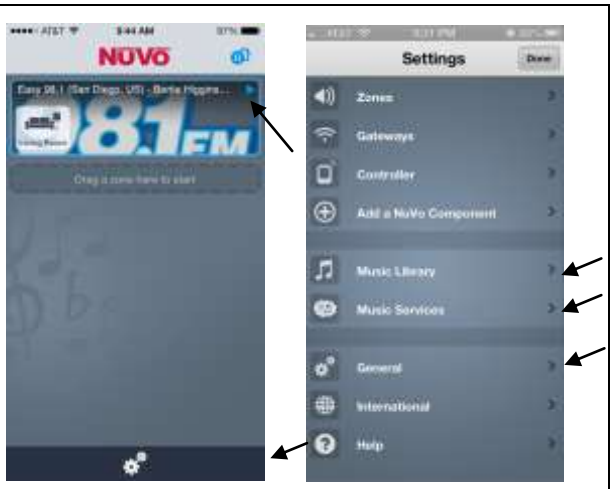

5b

There are two selections under "General" that are useful, the "About" selection, which gives you (or technical support) details about your product, or "Software Update" covered below.

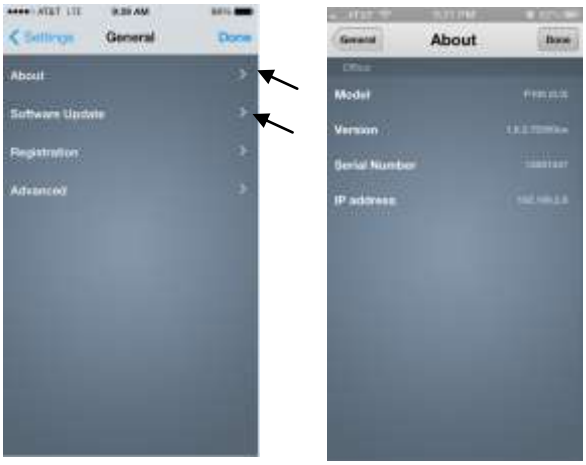

5c

When a new software update is available for the **AU7002**, a pop-up screen lets you know and allows you to select to do the update later or now. If you select "Continue" it takes you to the screen on the far right, gives you some info on the update and allows you to install it by pressing the "Install Now" selection.

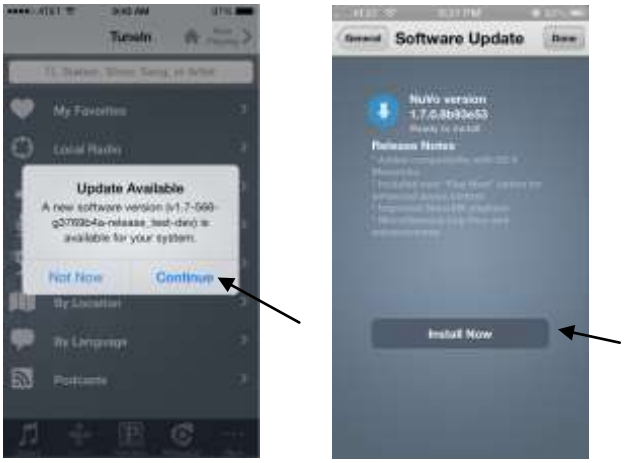

LED Status

Not Lit	No Power
Solid Green	Not Bound
Solid White	Normal Operation
Flashing Red	No Network
Solid Red	Hard Failure
Solid Blue	Mute On

Doc. #1507207 05/14 Rev C

© Copyright 2014 Legrand All Rights Reserved.

860.233.6251
1.877.BY.LEGRAND
www.legrand.us
www.legrand.ca