

PEANUT LIGHTING CONTROL PANELS

LP8

Simple and effective interior and exterior lighting control

Controls up to eight single-pole lighting circuits

Easy user interface with on-screen help



Compatible with AS-100 Automatic Control Switches for local override control

System clock provides time scheduled or astronomic control



DESCRIPTION

Wattstopper's LP8 Peanut Lighting Control Panels provide simple, effective zone-based control of exterior and interior lighting in small applications. Panels control up to eight channels or zones of lighting. Zones respond to control signals from the system clock (or other signaling device) to turn lighting on and off. LP8 Panels consist of relays, a system clock, panel intelligence, power supply, tub and cover. The standard enclosure is NEMA 1-rated.

OPERATION

For exterior applications, the system clock provides astronomic control (based on sunrise and sunset), or an optional EM Photocell can be added for light-level control. For interior applications, AS-100 Automatic Control Switches or low voltage switches can automate after-hours lighting shutoff while providing manual override control.

SYSTEM CLOCK

The LP8 system clock provides automation and features a seven-day format with holiday scheduling. Set-up and programming is simple with an easy-to-navigate keypad, backlit LCD and user-friendly help menus. Preprogrammed control scenarios include: scheduled-on/off and manual-on/scheduled-off. Manual-on/sweep-off is available with an AS-100 switch. Astronomic or photocell on/off, and astronomic or photocell with schedule on/off available by adding an EM Photocell.

APPLICATIONS

LP8 Panels save energy by turning lights off when not needed, while providing a secure illuminated space when occupants are present. They are ideal for areas with less than eight loads and a small amount of zones in both interior (i.e., small offices or retail facilities and elevator lobbies) and exterior (i.e., small parking lots, courtyards and driveways) applications. LP8 Panels integrate with a wide range of control devices, such as switches and occupancy sensors to create a flexible lighting shutoff strategy.

FEATURES

- Preprogrammed control scenarios; seven-day format with holiday scheduling, astronomic control and automatic daylight savings
- Time retained during power outage; nonvolatile program memory
- Eight universal switch inputs for low voltage switches, occupancy sensors, photocells or other devices to directly control each relay
- Pushbuttons for manual override of each relay
- Uses individually replaceable HDR5P Mechanically Latching Relay with integral manual override
- Optional group of eight switch inputs for pushbutton grouping of relays (Smartwiring™)
- LED for visual indication of relay status
- Accepts most types of switch inputs
- Separate high voltage and low voltage sections for user protection

PROJECT


LOCATION/
TYPE

SPECIFICATIONS

- Multiple power supplies available: 115/277 VAC, 115/347 VAC; 50/60 Hz
- Relay: Mechanically latching
 - Integral manual override
 - Individually replaceable
 - UL 20 listed for receptacle circuit control
 - Ratings: 20 Amp tungsten @ 120 VAC
 - 30 Amp ballast @ 277 VAC
 - 20 Amp ballast @ 347 VAC
 - 30 Amp resistive @ 347 VAC
 - 1.5 hp @ 120 VAC
- Accessory power 800 mA at 24 VDC/VAC/VACR
- Eight universal switch inputs; compatible with 3-wire momentary or maintained, 2-wire momentary or maintained, or 24 VDC input
- Eight universal group switch inputs that allow pushbutton grouping of relays (optional)
- Ambient temperature 32–139°F (0–60°C); 5–95% RH non-condensing
- Dimensions: 15.08" x 16.5" x 4.62" (383.0mm x 419.1mm x 117.3mm) L x W x D
- UL and CUL listed; one-year warranty.


INSTALLATION

LP8 Panel Layout

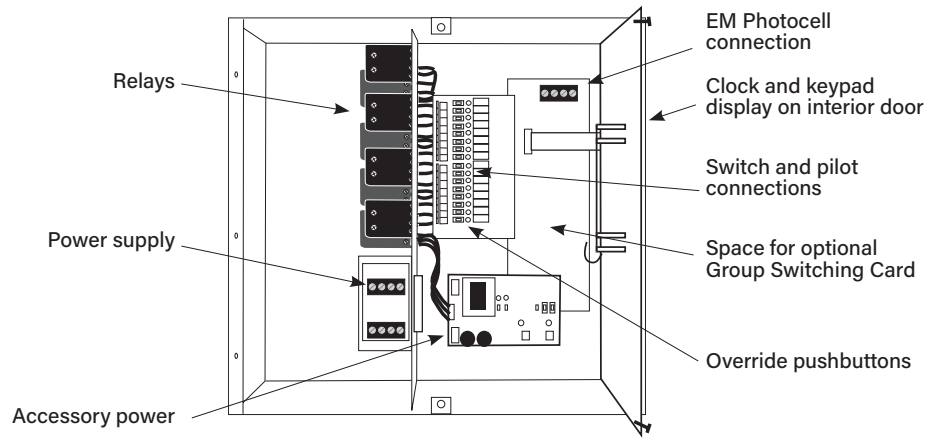

Shown with interior door open

LP8 Dimensions

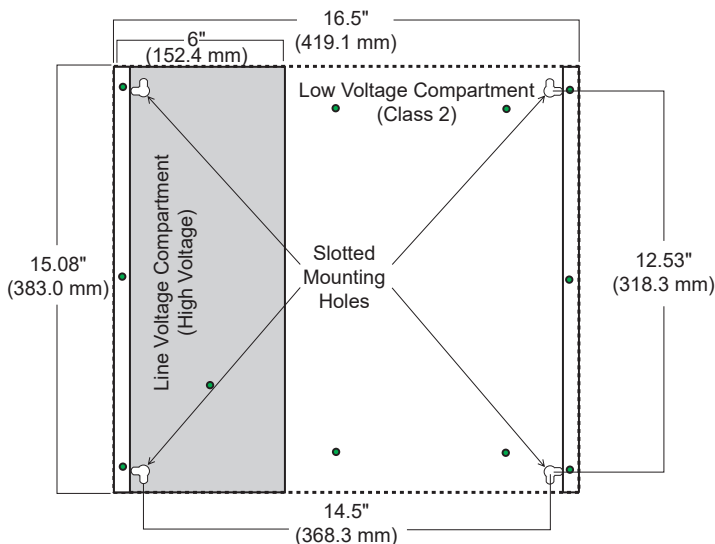

ORDERING INFORMATION

Catalog #	Description	Door Mounting	# Relays	Group Switching Card	Voltage
<input type="checkbox"/> LP8S-8-115	LP8 Peanut Lighting Control Panel	Surface	8 Relays	none	115/277 VAC
<input type="checkbox"/> LP8S-8-G-115	LP8 Peanut Lighting Control Panel	Surface	8 Relays	included	115/277 VAC
<input type="checkbox"/> LP8F-8-115	LP8 Peanut Lighting Control Panel	Flush	8 Relays	none	115/277 VAC
<input type="checkbox"/> LP8F-8-G-115	LP8 Peanut Lighting Control Panel	Flush	8 Relays	included	115/277 VAC
<input type="checkbox"/> LP8S-4-115	LP8 Peanut Lighting Control Panel	Surface	4 Relays	none	115/277 VAC
<input type="checkbox"/> LP8F-4-115	LP8 Peanut Lighting Control Panel	Flush	4 Relays	none	115/277 VAC
<input type="checkbox"/> LP8S-8-347	LP8 Peanut Lighting Control Panel	Surface	8 Relays	none	115/347 VAC
<input type="checkbox"/> LP8S-8-G-347	LP8 Peanut Lighting Control Panel	Surface	8 Relays	included	115/347 VAC
<input type="checkbox"/> LP8F-8-347	LP8 Peanut Lighting Control Panel	Flush	8 Relays	none	115/347 VAC
<input type="checkbox"/> LP8F-8-G-347	LP8 Peanut Lighting Control Panel	Flush	8 Relays	included	115/347 VAC

Optional System Enhancements

<input type="checkbox"/> EM-24A2	Exterior Photocell, low voltage				24VAC
<input type="checkbox"/> AS-100-W	Automatic Control Switch, White				120/277 VAC, 50/60 Hz

All panels and the EM-24A2 are compliant with Buy American Act and Build America, Buy America Act