

Product Environmental Profile

Pass & Seymour - Commercial Spec Grade Receptacles 125/250V



COMPANY OVERVIEW

• Sustainability built in to support our associates, customers, and the environment

At Legrand North America, we're committed to leading by example within our own operations, to developing high quality solutions for our customers' High Performance Buildings, and to transforming how people live and work – more safely, more comfortably, more efficiently.

• Better Performance

A core principle of designing for sustainability drives us to innovate products and systems that enable buildings to reach exceptional levels of performance, bringing about industry-leading ideas, inventions and initiatives.

• Better Operations

A commitment to a leadership role in operational excellence through environmental management, optimizing the way we manage energy, water and waste.

• Better Lives

A dedication to enhancing employee and community welfare through programs that help people enjoy healthier, more productive and more rewarding lives.

For more information on Legrand's PEPs and other sustainability initiatives, visit legrand.us/sustainability.



LEGRAND'S ENVIRONMENTAL COMMITMENTS

• Incorporate environmental management into our industrial sites

Of all Legrand sites worldwide, over 85% are ISO 14001 certified (sites belonging to Legrand for more than five years).

• Offer our customers environmentally friendly solutions

Develop innovative solutions to help our customers design more energy efficient, better managed and more environmentally friendly installations.


• Involve the environment in product design

Reduce the environmental impact of products over their whole life cycle.

Provide our customers with all relevant information (composition, consumption, end of life, etc.).



REFERENCE PRODUCT

Function	To connect/disconnect the plug of a load consuming 20A under a voltage of 125V (nominal: 120V) while protecting the user from direct contact with live parts for 20 years.
Reference Product	<div style="text-align: center;">  </div> <p style="text-align: center;">Part Number: CR20W</p> <p style="text-align: center;">Receptacle - Duplex; Commercial Grade; 20A/125V (NEMA 5-20R); Side Wire; White</p>

The company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in the document are for guidance and cannot be held binding on the company.

Product Environmental Profile

Pass & Seymour - Commercial Spec Grade Receptacles 125/250V



PRODUCTS CONCERNED

The environmental data in this PEP is representative of the following products (given with their base catalog numbers):

- Series **CR20***: 20A/125V receptacles
- Series **CR15***: 15A/125V receptacles
- Series **5850***: 20A/250V receptacles

Where * represents a possible color and/or packaging variation indicated by a suffix to the base catalog number (e.g. W = white). See the extrapolation rules at the end of the document for environmental impact conversion metrics between products.



CONSTITUENT MATERIALS

This Reference Product contains no substances prohibited by the regulations applicable at the time of its introduction to the market. It respects the restrictions on use of hazardous substances as defined in the RoHS directive 2011/65/EC.

Total weight of Reference Product (with unit packaging)	107.4 g (3.8 oz)
--	-------------------------

Plastics as % of weight		Metals as % of weight		Other as % of weight	
PVC (polyvinyl chloride)	12.9%	Steel	27.5%		
PA (polyamide resin 6 - nylon)	11.4%	Copper Alloys (Brass)	14.8%		
				Packaging as % of weight	
				Paper and Cardboard	21.7%
				Wood (pallet)	11.6%
				PE (polyethylene)	<0.1%
Total plastics	24.3%	Total metals	42.3%	Total other and packaging	33.3%

Estimated recycled material content: 33% of weight.



MANUFACTURING

The Reference Product comes from a site that has received ISO 14001 certification.



DISTRIBUTION

Products are distributed from logistics centers located to optimize transport efficiency using EPA SmartWay® certified carriers to reduce greenhouse gas emissions. Information on the distance of distribution is not available so the average distance of 1200 km by heavy truck was used. This represents transportation of the Reference Product from our warehouse to the local point of distribution in the North American market.

Product Environmental Profile

Pass & Seymour - Commercial Spec Grade
 Receptacles 125/250V



INSTALLATION

No electricity is required for installing the Reference Product and only standard tools are needed.



USE

Servicing and maintenance:

Under normal conditions of use, this type of product requires no servicing or maintenance.

Consumable:

No consumables are necessary to use this type of product.



END OF LIFE

• **Hazardous waste* contained in the product:** no hazardous waste
 (*) Hazardous waste as defined by European Commission decision 2000/532/EC.

• Recycling rate:

Calculated using the method described in the IEC/TR 62635 technical report, the recyclability rate of the Reference Product (including packaging) is estimated as 98%. This value is based on data collected from a technological channel using industrial procedures. It does not pre-validate the effective use of this channel for end-of-life electrical and electronic products.

Separated into:	(% mass of Reference Product)
- plastic materials (excluding packaging):	23%
- metal materials (excluding packaging):	42%
- packaging (all types of materials):	33%



ENVIRONMENTAL IMPACTS

The evaluation of environmental impacts examines the stages of the Reference Product life cycle: manufacturing, distribution, installation, use, and end of life. It is representative of products marketed and used in North America.

The following modelling elements were taken into account:

Manufacturing	Packaging taken into account. As required by the PEP ecopassport program, all transport for the manufacturing of the Reference Product, including materials and components, has been taken into account. The waste generated during manufacturing phase has been taken into account.
Distribution	Transport between the last distribution center and an average delivery to the sales area. The default scenario modelled maximizes the environmental impact.
Installation	The end of life of the packaging is taken into account at this phase including transport of the packaging to end of life treatment.
Use	<ul style="list-style-type: none"> • Under normal conditions of use, this type of product requires no servicing or maintenance. • No consumables are necessary to use this type of product. • Product category: electric power socket • Use scenario: for a 20 year working life, the product operates at 50% of the rated load for 50% of the time. • Energy model: Electricity(US) - 2009
End of life	The default end of life scenario modelled maximizes the environmental impact.
Software used	EIME V5 and its database "CODDE-2016-11" and the indicators defined in the PCR ed 3 in alignment with the EN15804 standard

Product Environmental Profile

Pass & Seymour - Commercial Spec Grade
 Receptacles 125/250V




ENVIRONMENTAL IMPACTS (continued)

	Total for Life cycle		Raw material and manufacturing		Distribution		Installation		Use		End of life	
	Value	Unit	Value	%	Value	%	Value	%	Value	%	Value	%
Global warming (GW)	3.08E+01	kg CO ₂ eq.	4.36E-01	1%	6.42E-03	< 1%	2.08E-03	< 1%	3.03E+01	99%	6.05E-03	< 1%
Ozone depletion (OD)	5.86E-07	kg CFC-11 eq.	3.53E-08	6%	1.30E-11	< 1%	1.14E-11	< 1%	5.50E-07	94%	9.86E-11	< 1%
Acidification of soil and water (A)	3.01E-02	kg SO ₂ eq.	9.52E-04	3%	2.88E-05	< 1%	9.92E-06	< 1%	2.90E-02	97%	2.43E-05	< 1%
Water eutrophication (WE)	7.93E-03	kg PO ₄ ³⁻ eq.	2.29E-04	3%	6.62E-06	< 1%	8.33E-06	< 1%	7.65E-03	96%	3.43E-05	< 1%
Photochemical ozone creation (POCP)	4.75E-03	kg C ₂ H ₄ eq.	9.62E-05	2%	2.05E-06	< 1%	7.02E-07	< 1%	4.65E-03	98%	1.86E-06	< 1%
Depletion of abiotic resources - elements (ADPe)	2.24E-05	kg Sb eq.	2.21E-05	99%	2.57E-10	< 1%	8.83E-11	< 1%	2.98E-07	1%	3.24E-10	< 1%
Total use of primary energy (PE)	4.18E+02	MJ	9.42E+00	2%	9.07E-02	< 1%	2.88E-02	< 1%	4.08E+02	98%	7.07E-02	< 1%
Net use of fresh water (FW)	5.87E-02	m ³	5.14E-03	9%	5.74E-07	< 1%	5.16E-07	< 1%	5.36E-02	91%	3.50E-06	< 1%
Depletion of abiotic resources - fossil fuels (ADPf)	4.86E+02	MJ	5.62E+00	1%	9.01E-02	< 1%	2.90E-02	< 1%	4.80E+02	99%	8.30E-02	< 1%
Water pollution (WP)	1.52E+03	m ³	2.30E+01	2%	1.06E+00	< 1%	3.27E-01	< 1%	1.50E+03	98%	7.70E-01	< 1%
Air pollution (AP)	2.71E+03	m ³	1.31E+02	5%	2.63E-01	< 1%	2.09E-01	< 1%	2.58E+03	95%	5.36E-01	< 1%

The values of the 27 impacts defined in the PCR-ed3-EN-2015 04 02 are available in the digital database of pep-ecopassport.org website. The environmental impacts of the Reference Product are representative of the products covered by the PEP, which therefore constitute a homogeneous environmental family.

% Environmental Impact per Life Cycle Stage of Reference Product

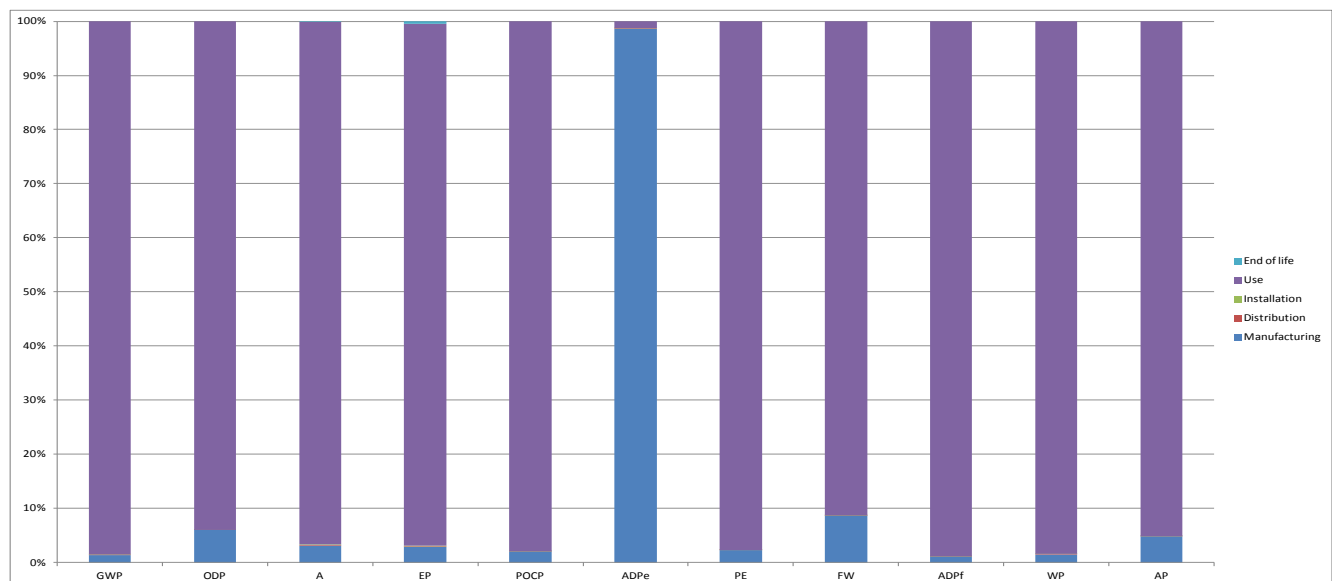

The environmental impact of the Reference Product occurs predominantly during the use phase.

Product Environmental Profile

Pass & Seymour - Commercial Spec Grade Receptacles 125/250V



ENVIRONMENTAL IMPACTS (continued)

For products other than the Reference Product, the environmental impacts of each phase of the lifecycle are calculated with the following rules:

Use phase: The environmental impacts in the use phase come solely from the electric losses due to internal resistance when using this product. Series CR15 receptacles have lower impacts due to a smaller draw of current than the series CR20 or the series 5850 products (15A maximum compared to 20A maximum). Because power is proportional to the square of the current and internal resistance is equivalent across these receptacles, to get the use impacts of the CR15, multiply the use impacts of the CR20 by 0.5625 (15²/20²).

All other phases: The environmental impacts are identical due to equivalent manufacturing, distribution, installation, and end-of-life processes. All receptacles contain identical materials with the only differentiating factor between them being different configurations of the duplex cover which indicate the voltage and amperage ratings. Packaging for the receptacles is also almost identical with the only differentiating factor being the presence or absence of certain labels.

Registration number: LGRP-00728-V01.01-EN	Drafting rules: "PCR-ed3-EN-2015 04" Supplemented by "PSR-005-ed2-2016 03 29"
Verifier's accreditation number: VH33	Information and reference documents: www.pep-ecopassport.org
Date of issue: 11-2018	Validity period: 5 years
Independent verification of the declaration and data, in compliance with ISO 14025:2010 Internal <input type="checkbox"/> External <input checked="" type="checkbox"/>	
The PCR Review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN).	
The elements of the present PEP cannot be compared with elements from another program.	
Document in compliance with ISO 14025:2010: "Environmental labels and declarations - Type III environmental declarations"	
In compliance with ISO 14040:2006: "Environmental management - LCA - Principles and framework"	
In compliance with ISO 14044:2006: "Environmental management - LCA - Requirements and guidelines"	
In alignment with EN 15804:2012+A1:2013: "Sustainability of construction works - EPD's - Core rules for the product category of construction products"	